

INTRODUCTION

Thank you for purchasing the SHARP Scientific Calculator Model EL-W506/W516/W546.

About the calculation examples (including some formulas and tables), refer to the calculation example sheet. Refer to the number on the right of each title in the manual for use.

After reading this manual, store it in a convenient location for future reference.

Notes:

- Some of the models described in this manual may not be available in some countries.
- This product uses a period as a decimal point.

Operational Notes

- Do not carry the calculator around in your back pocket, as it may break when you sit down. The display is made of glass and is particularly fragile.
- Keep the calculator away from extreme heat such as on a car dashboard or near a heater, and avoid exposing it to excessively humid or dusty environments.
- Since this product is not waterproof, do not use it or store it where fluids, for example water, can splash onto it. Raindrops, water spray, juice, coffee, steam, perspiration, etc. will also cause malfunction.
- Clean with a soft, dry cloth. Do not use solvents or a wet cloth.
- Do not drop it or apply excessive force.
- Never dispose of batteries in a fire.
- Keep batteries out of the reach of children.
- For the sake of your health, try not to use this product for long periods of time. If you need to use the product for an extended period, be sure to allow your eyes, hands, arms, and body adequate rest periods (about 10–15 minutes every hour).
If you experience any pain or fatigue while using this product, discontinue use immediately. If the discomfort continues, please consult a doctor.
- This product, including accessories, may change due to upgrading without prior notice.

NOTICE

- SHARP strongly recommends that separate permanent written records be kept of all important data. Data may be lost or altered in virtually any electronic memory product under certain circumstances. Therefore, SHARP assumes no responsibility for data lost or otherwise rendered unusable whether as a result of improper use, repairs, defects, battery replacement, use after the specified battery life has expired, or any other cause.
- SHARP will not be liable nor responsible for any incidental or consequential economic or property damage caused by misuse and/or malfunctions of this product and its peripherals, unless such liability is acknowledged by law.

- ◆ Press the RESET switch (on the back), with the tip of a ball-point pen or similar object, only in the following cases:
 - When using for the first time
 - After replacing the battery
 - To clear all memory contents
 - When an abnormal condition occurs and all keys are inoperative


Do not use an object with a breakable or sharp tip. Note that pressing the RESET switch erases all data stored in memory.

If service should be required on this calculator, use only a SHARP servicing dealer, SHARP approved service facility, or SHARP repair service where available.


Hard Case



Remove the hard case, holding it with your fingers in the positions shown below.



DISPLAY

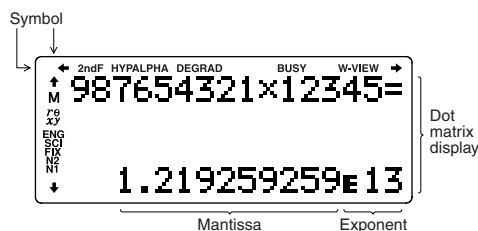

- During actual use, not all symbols are displayed at the same time.
- Only the symbols required for the usage currently being explained are shown in the display and calculation examples in this manual.

- ↔: Indicates that some contents are hidden in the directions shown.
- ↑/↓: Indicates that some contents are hidden in the directions shown.
- 2ndF: Appears when (2ndF) is pressed, indicating that the functions shown in orange are enabled.
- HYP: Indicates that (hyp) has been pressed and the hyperbolic functions are enabled. If (2ndF) (arc hyp) is pressed, the symbols 2ndF HYP appear, indicating that inverse hyperbolic functions are enabled.
- ALPHA: Indicates that (ALPHA), (STO) or (RCL) has been pressed, and entry (recall) of memory contents and recall of statistics can be performed.
- DEG/RAD/GRAD: Indicates angular units.
- BUSY: Appears during the execution of a calculation.
- W-VIEW: Indicates that the WriteView editor is selected.
- M: Indicates that a numerical value is stored in the independent memory (M).
- rθ/xy: Indicates the mode of expression for results in CPLX mode.
- ENG/SCI/FIX/N2/N1: Indicates the notation used to display a value and changes by SET UP menu. N1 is displayed on-screen as "NORM1", and N2 as "NORM2".

BEFORE USING THE CALCULATOR

When using for the first time, press the RESET switch (on the back), with the tip of a ball-point pen or similar object.

Adjusting the Display Contrast

Press (2ndF) (SETUP) (3), then (+) or (-) to adjust the contrast. Press (ON/C) to exit.

Power On and Off

Press (ON/C) to turn the calculator on. The data that was on-screen when the power was turned off will appear on the display. Press (2ndF) (OFF) to turn the calculator off.

Key Notations Used in this Manual


In this manual, key operations are described as follows:

- e^x E To specify e^x : (2ndF) (e^x)
- In To specify In: (In)
- To specify E: (ALPHA) (E)


- Functions that are printed in orange above the key require (2ndF) to be pressed first before the key. When you specify the memory, press (ALPHA) first. Numbers for input values are not shown as keys, but as ordinary numbers.
- Functions that are printed in gray adjacent to the keys are effective in specific modes.
- The multiplication operator "×" is differentiated from the letter "X" in this manual as follows:
 - To specify the multiplication operator: (×)
 - To specify the letter "X": (ALPHA) (X)

The WriteView and Line Editors

This calculator has the following two editors in NORMAL mode: WriteView and Line. You can select between them in the SET UP menu.



The WriteView editor (default)



The Line editor

Notes:

- The WriteView Editor is only available in NORMAL mode.
- In certain calculation examples, where you see the (LINE) symbol, the key operations and calculation results are shown as they would appear in the Line editor.

Clearing the Entry and Memories

Operation	Entry (Display)	A-F, M, X, Y*1	F1-F4, D1-D4*2	ANS STAT*3	matA-D*4	L1-L4*5
(ON/C)	○	×	×	×	×	×
(2ndF) (CA)	○	×	×	○	○	○
Mode selection ((MODE))	○	×	×	×	×	○*6
(2ndF) (M-CLR) (0) *7	○	×	×	×	×	×
(2ndF) (M-CLR) (1) (0) *7	○	○	○	○	○	○
(2ndF) (M-CLR) (2) (0) *7,*8	○	○	○	○	○	○
RESET switch*8	○	○	○	○	○	○


○: Clear ×: Retain

- *1 Press (ON/C) (STO) and then choose a memory to clear one variable memory.
- *2 Formula memories and definable memories. See "Memory Calculations".
- *3 Statistical data (entered data)
- *4 Matrix memories (matA, matB, matC, and matD)
- *5 List memories (L1, L2, L3, and L4)
- *6 Cleared when changing between sub-modes in STAT mode.
- *7 See "Memory clear key".
- *8 The username you stored using the name display function will be cleared as well.


Memory clear key

Press (2ndF) (M-CLR) to display the menu.

- To initialize the display settings, press (0). The parameters are set as follows:
 - Angular unit: DEG
 - Display notation: NORM1
 - N-base: DEC
- To clear all variables and memories (A-F, M, X, Y, F1-F4, D1-D4, ANS, STAT, matA-D, and L1-L4) at once, press (1) (0).
- To RESET the calculator, press (2) (0). The RESET operation will erase all data stored in memory and restore the calculator's default settings. You can do the same thing by pressing the RESET switch on the back of the calculator.



Mode Selection




- NORMAL mode: (MODE) (0) (default)
Used to perform arithmetic operations and function calculations.
- STAT mode: (MODE) (1)
Used to perform statistical operations.
- DRILL mode: (MODE) (2)
Used to practice math and multiplication table drills.
- CPLX mode: (MODE) (3)
Used to perform complex number calculations.
- MATRIX mode: (MODE) (4)
Used to perform matrix calculations.
- LIST mode: (MODE) (5)
Used to perform list calculations.
- EQUATION mode: (MODE) (6)
Used to solve equations.

SET UP Menu

Press 2ndF SETUP to display the SET UP menu.

Press ON/C to exit the SET UP menu.



Determination of the angular unit

The following three angular units (degrees, radians, and grads) can be specified.

DEG ($^\circ$): 2ndF SETUP 0 0 (default)

RAD (rad): 2ndF SETUP 0 1

GRAD (g): 2ndF SETUP 0 2

Selecting the display notation and decimal places

Five display notation systems are used to display calculation results: Two settings of Floating point (NORM1 and NORM2), Fixed decimal point (FIX), Scientific notation (SCI), and Engineering notation (ENG).

- When 2ndF SETUP 1 0 (FIX) or 2ndF SETUP 1 2 (ENG) is pressed, "TAB(0-9)?" will be displayed and the number of decimal places (TAB) can be set to any value between 0 and 9.
- When 2ndF SETUP 1 1 (SCI) is pressed, "SIG(0-9)?" will be displayed and the number of significant digits can be set to any value between 0 and 9. Entering 0 will set a 10-digit display.

Setting the floating point number system in scientific notation

Two settings are used to display a floating-point number: NORM1 (the default) and NORM2. A number is automatically displayed in scientific notation outside a preset range:

- NORM1 (2ndF SETUP 1 3): $0.000000001 \leq |x| \leq 9,999,999,999$
- NORM2 (2ndF SETUP 1 4): $0.01 \leq |x| \leq 9,999,999,999$

Selecting the editor

Two editors are available in NORMAL mode:

- The WriteView editor (W-VIEW): 2ndF SETUP 2 0 (default)
- The Line editor (LINE): 2ndF SETUP 2 1

Note: Any entries will be cleared when you change the editor.

Adjusting the display contrast

Press 2ndF SETUP 3 , then + or - to adjust the contrast. Press ON/C to exit.

Insert and overwrite entry methods

When using the Line editor, you can change the entry method from "INSERT" (the default) to "OVERWRITE".

After you switch to the overwrite method (by pressing 2ndF SETUP 4 1), the triangular cursor will change to a rectangular one, and the number or function underneath it will be overwritten as you make entries.


Name display function

You can save a username in this calculator. When you turn the power off, the saved username is displayed momentarily.

Up to 32 characters may be saved, split over two lines.

Entering and editing the username:

- Press 2ndF SETUP 5 . The editing screen appears with a flashing cursor.



- Use \blacktriangle and \blacktriangledown to scroll through the available characters. The following characters can be entered (listed in the order that they appear):

Letters (A to Z, uppercase only), numbers (0 to 9), slash (/), hyphen (-), colon (:), apostrophe ('), comma (,), period (.), and space ().

Press 2ndF \blacktriangle to jump to "A", and press 2ndF \blacktriangledown or ON/C to jump to the space.

- Pressing \blacktriangleleft or \blacktriangleright moves the cursor to the left or right. To modify a character, use \blacktriangleleft or \blacktriangleright to move the cursor to the character, then select another character using \blacktriangle or \blacktriangledown .

Press 2ndF \blacktriangleleft or 2ndF \blacktriangleright to jump to the beginning of the first line or the end of the second.

- Repeat steps 2 and 3 above to continue entering characters.
- Press = to save.


Note: Press 2ndF CA in the editing screen to clear all the characters.

ENTERING, DISPLAYING, AND EDITING THE EQUATION

The WriteView Editor

Entry and display

In the WriteView editor, you can enter and display fractions or certain functions as you would write them.



Notes:

- The WriteView editor can only be used in NORMAL mode.
- If the equation grows too large, it may extend off the edge of the display after you obtain the result. If you want to see the entire equation, press \blacktriangleleft or \blacktriangleright to return to the editing screen.

Displaying calculation results

When possible, calculation results will be displayed using fractions, $\sqrt{\quad}$, and π . When you press CHANGE , the display will cycle through the following display styles:

- Mixed fractions (with or without π) \rightarrow improper fractions (with or without π) \rightarrow decimal numbers
- Proper fractions (with or without π) \rightarrow decimal numbers
- Irrational numbers (square roots, fractions made using square roots) \rightarrow decimal numbers

Notes:


- In the following cases, calculation results may be displayed using $\sqrt{\quad}$:
 - Arithmetic operations and memory calculations
 - Trigonometric calculations
- In trigonometric calculations, when entering values such as those in the table to the right, results may be shown using $\sqrt{\quad}$.

	Entry value
DEG	multiples of 15
RAD	multiples of $\frac{1}{12}\pi$
GRAD	multiples of $\frac{50}{3}$
- Calculation results may extend off the edges of the screen. You can see those parts by pressing \blacktriangleleft or \blacktriangleright (depending on whether the left or right portion is hidden).
- Improper/proper fractions will be converted to and displayed as decimal numbers if the number of digits used in their expression is greater than nine. In the case of mixed fractions, the maximum number of displayable digits (including integers) is eight.
- If the number of digits in the denominator of a fractional result that uses π is greater than three, the result is converted to and displayed as a decimal number.

The Line Editor

Entry and display

In the Line editor, you can enter and display equations line by line.



Notes:

- Up to three lines of text may be viewed on the screen at one time.
- If the length of the equation exceeds three lines, parts of it may be hidden from view after calculation. If you want to see the rest of the equation, press \blacktriangleleft or \blacktriangleright to return to the editing screen.
- In the Line editor, calculation results are displayed in decimal form or line fraction notation if possible.

Editing the Equation

Just after obtaining an answer, pressing \blacktriangleleft brings you to the end of the equation and pressing \blacktriangleright brings you to the beginning. Press \blacktriangleleft , \blacktriangleright , \blacktriangle , or \blacktriangledown to move the cursor. Press 2ndF \blacktriangleleft or 2ndF \blacktriangleright to jump the cursor to the beginning or the end of the equation.

In the WriteView editor, you can use \blacktriangle and \blacktriangledown to move the cursor up and down—between the numerator and denominator, for example.


Back space and delete key

To delete a number or function, move the cursor to the right of it, then press BS . You can also delete a number or function that the cursor is directly over by pressing 2ndF DEL .

The MATH Menu

Other functions may be available on this calculator besides those printed on the key pad. These functions are accessed using the MATH menu. The MATH menu has different contents for each mode.

Press MATH to display the MATH menu. For example, in NORMAL mode, you can call the functions shown on the right.



Notes:

- When the \blacktriangle or \blacktriangledown symbols are displayed, you can use \blacktriangle or \blacktriangledown to display any hidden menu items.
- MATH does not function when entering values or items in STAT, MATRIX, LIST, or EQUATION modes, or into solver functions or simulation calculations.

The CATALOG Menu

Using the CATALOG menu, you can select functions and variables that are available for what you are doing in the currently selected mode. To display the CATALOG menu, press **MATH** **0**.

- Press **▲** or **▼** to move the cursor (↔) and press **ENTER** to select.
- Press **◀** or **▶** to scroll up or down.
- Press **2ndF** **▲** or **2ndF** **▼** to jump to the first or last item.

Note: You cannot bring up the CATALOG menu when entering values or items in STAT, MATRIX, LIST, or EQUATION modes, or into solver functions or simulation calculations.

Multi-line Playback Function

This calculator is equipped with a function to recall previous equations and answers in NORMAL or CPLX modes. A maximum of 340 characters can be stored in memory. When the memory is full, stored equations will be deleted to make room, starting with the oldest.

Pressing **▲** will display the previous equation. Further pressing **▲** will display preceding equations (after returning to the previous equation, press **▼** to view equations in order). In addition, **2ndF** **▲** can be used to jump to the oldest equation, and **2ndF** **▼** to jump to the newest one.

- To edit an equation after recalling it, press **◀** or **▶**.

The multi-line memory will be cleared by the following operations:

2ndF **CA**, mode change, RESET, N-base conversion, angular unit conversion, editor change (**2ndF** **SETUP** **2** **0** or **2ndF** **SETUP** **2** **1**), and memory clear (**2ndF** **M-CLR** **1** **0**).

- Equations that have one result require an additional eleven characters' worth of memory to store in order to hold the result.
- In addition to the amount of memory needed to store an equation, the WriteView editor will require a certain amount for the sake of display.
- Equations also include calculation ending instructions, such as "=".

Priority Levels in Calculation

This calculator performs operations according to the following priority:

- Fractions (1 ÷ 4, etc.)
- ∠, Engineering prefixes
- Functions preceded by their argument (x^{-1} , x^2 , $n!$, etc.)
- y^x , x^y , $\sqrt{\quad}$
- Implied multiplication of a memory value (2Y, etc.)
- Functions followed by their argument (sin, cos, (−), etc.)
- Implied multiplication of a function (2sin30, $A\frac{1}{4}$, etc.)
- nCr, nPr, $\rightarrow cv$
- \times , \div , $+$, $-$
- AND
- OR, XOR, XNOR
- =, M+, M−, \Rightarrow M, \blacktriangleright DEG, \blacktriangleright RAD, \blacktriangleright GRAD, DATA, $\rightarrow r\theta$, $\rightarrow xy$, and other calculation ending instructions

- If parentheses are used, parenthesized calculations have precedence over any other calculations.

SCIENTIFIC CALCULATIONS

- Press **MODE** **0** to select NORMAL mode.
- In each example, press **ON/C** to clear the display first. Unless otherwise specified, calculation examples are performed in the WriteView editor (**2ndF** **SETUP** **2** **0**) with the default display settings (**2ndF** **M-CLR** **0**).

Arithmetic Operations

- The closing parenthesis **)** just before **=** or **M+** may be omitted.

Constant Calculations

- In constant calculations, the addend becomes a constant. Subtraction and division are performed in the same manner. For multiplication, the multiplicand becomes a constant.
- In constant calculations, constants will be displayed as K.
- Constant calculations can be performed in NORMAL or STAT modes.

Functions

- Refer to the calculation examples for each function.
- In the Line editor, the following symbols are used:
 - \bullet : to indicate an expression's power. (x^y , **2ndF** e^x , **2ndF** 10^x)
 - $\frac{\bullet}{\bullet}$: to separate integers, numerators, and denominators. ($\frac{a}{b}$, **2ndF** $\frac{ab}{c}$)
- When using **2ndF** \log_{\bullet} or **2ndF** abs in the Line editor, values are entered in the following way:
 - \log_n (base, value)
 - abs value

Integral/Differential Calculations

Integral and differential calculations can be performed in NORMAL mode.

Note: Since integral and differential calculations are performed based on the following equations, correct results may not be obtained, in certain rare cases, when performing special calculations that contain discontinuous points.

Integral calculation (Simpson's rule):

$$S = \frac{1}{3}h\{f(a) + 4\{f(a+h) + f(a+3h) + \dots + f(a+(N-1)h)\} + 2\{f(a+2h) + f(a+4h) + \dots + f(a+(N-2)h)\} + f(b)\} \left\{ \begin{array}{l} h = \frac{b-a}{N} \\ N = 2n \\ a \leq x \leq b \end{array} \right.$$

$$\text{Differential calculation: } f'(x) = \frac{f(x + \frac{dx}{2}) - f(x - \frac{dx}{2})}{dx}$$

Performing integral calculations

- Press **∫dx**.
- Specify the following parameters: range of integral (initial value (a), end value (b)), function with variable x, and number of subintervals (n).

You do not need to specify the number of subintervals. If the number of subintervals is not specified, the default value of $n = 100$ will be used.

- Press **=**.

Notes:


- Parameters are entered in the following way:

WriteView editor:
 \int_a^b function[, subintervals]dx

Line editor:
f(function, a, b[, subintervals])

- Integral calculations, depending on the integrands and subintervals included, require longer calculation time. During calculation, the **BUSY** symbol will be displayed. To cancel calculation, press **ON/C**.

Note that there will be greater integral errors when there are large fluctuations in the integral values during minute shifting of the integral range and for periodic functions, etc., where positive and negative integral values exist depending on the interval.



For the former case, divide integral intervals as small as possible. For the latter case, separate the positive and negative values. Following these tips will allow you to obtain results from calculations with greater accuracy and will also shorten the calculation time.

Performing differential calculations

- Press **2ndF** $\frac{d}{dx}$.
- Specify the following parameters: function with variable x, value of x, and minute interval (dx).

You do not need to specify the minute interval. If the minute interval is not specified, it will automatically be set to 10^{-5} (while $x = 0$), or $|x| \times 10^{-5}$ (while $x \neq 0$).

- Press **=**.

Note: Parameters are entered in the following way:

WriteView editor:
 $\frac{d(\text{function})}{dx} \Big|_{x = \text{value of } x}$, minute interval]

Line editor:
d/dx (function, value of x[, minute interval])

∑ Function

The \sum function returns the cumulative sum of a given expression from an initial value to an end value in NORMAL mode.

Performing ∑ calculations

- Press **2ndF** \sum .
 - Specify the following parameters: initial value, end value, function with variable x, and increment (n).
- You do not need to specify the increment. If the increment is not specified, the default value of $n = 1$ will be used.
- Press **=**.

Note: Parameters are entered in the following way:

WriteView editor:
end value
 \sum (function[, increment])
x=initial value

Line editor:
 \sum (function, initial value, end value[, increment])

Random Function

The random function has four settings. (This function cannot be selected while using the N-base function.) To generate further random numbers in succession, press **ENTER**. Press **ON/C** to exit.

Random numbers

A pseudo-random number, with three significant digits from 0 up to 0.999, can be generated by pressing **2ndF** **RANDOM** **0** **ENTER**.

Note: In the WriteView editor, if the result is not 0 it can be shown as a fraction or decimal using **CHANGE**.

Random dice

To simulate a die-rolling, a random integer between 1 and 6 can be generated by pressing **2ndF** **RANDOM** **1** **ENTER**.

Random coin

To simulate a coin flip, 0 (heads) or 1 (tails) can be randomly generated by pressing **2ndF** **RANDOM** **2** **ENTER**.

Random integer

An integer between 0 and 99 can be generated randomly by pressing **2ndF** **RANDOM** **3** **ENTER**.

Angular Unit Conversions

Each time **2ndF** **DRG** is pressed, the angular unit changes in sequence.

Memory Calculations

Mode	ANS	M, F1–F4	A–F, X, Y	D1–D4
NORMAL	○	○	○	○
STAT	○	○	○	○
CPLX	○	○	×	○
MATRIX	○	○	○	○
LIST	○	○	○	○

○: Available ×: Unavailable

Temporary memories (A–F, X and Y)

Press **STO** and a variable key to store a value in memory.

Press **RCL** and a variable key to recall the value from that memory. To place a variable in an equation, press **ALPHA** and a variable key.

Independent memory (M)

In addition to all the features of temporary memories, a value can be added to or subtracted from an existing memory value.

Press **ON/C** **STO** **M** to clear the independent memory (M).

Last answer memory (ANS)

The calculation result obtained by pressing **=** or any other calculation ending instruction is automatically stored in the last answer memory.

When the calculation result is in matrix or list form, the full matrix or list is not stored into ANS memory. Only the value of the element covered by the cursor is stored.

Notes:

- Calculation results from the functions indicated below are automatically stored in the X or Y memories replacing any existing values.
 - $\rightarrow r\theta$, $\rightarrow xy$: X memory (r or x), Y memory (θ or y)
 - Two x^y values from a quadratic regression calculation in STAT mode: X memory (1:), Y memory (2:)
- Use of **RCL** or **ALPHA** will recall the value stored in memory using up to 14 digits.

Formula memories (F1–F4)

You can store expressions in formula memories (F1–F4). Storing a new expression in a memory space will automatically replace any content that may already exist there.

Notes:

- Expressions that are stored from the WriteView editor cannot be recalled from within the Line editor, and vice versa.
- You can only recall expressions stored from the Line editor when entering values or items in STAT, MATRIX, LIST, or EQUATION modes, or into solver functions or simulation calculations.
- Any recalled expressions will overwrite any expressions that are currently being entered.
- You cannot store formulas in formula memories when entering values or items in STAT, MATRIX, LIST, or EQUATION modes, or into solver functions or simulation calculations.

Definable memories (D1–D4)

You can store functions or operations in definable memories (D1–D4).

- To store a function or operation, press $\boxed{\text{STO}}$, followed by a definable memory key ($\boxed{\text{D1}}$, $\boxed{\text{D2}}$, $\boxed{\text{D3}}$, or $\boxed{\text{D4}}$), followed by the operation you want to store. Menu-related operations, such as $\boxed{2\text{ndF}} \boxed{\text{SETUP}}$, cannot be stored. Press $\boxed{\text{ON/C}}$ to return to the previous display.
- To call a stored function or operation, press the corresponding memory key. Calling a stored function will not work if the function that is called would be unusable in the current context.
- Any functions or operations that are stored in a definable memory will be replaced when you save a new one into that memory.
- You cannot store functions or operations in definable memories when entering values or items in STAT, MATRIX, LIST, or EQUATION modes, or into solver functions or simulation calculations.

Chain Calculations

The previous calculation result can be used in the subsequent calculation. However, it cannot be recalled after entering multiple instructions or when the calculation result is in matrix/list format.

Fraction Calculations

Arithmetic operations and memory calculations can be performed using fractions. In NORMAL mode, conversion between a decimal number and a fraction can be performed by pressing $\boxed{\text{CHANGE}}$.

Notes:

- Improper/proper fractions will be converted to and displayed as decimal numbers if the number of digits used in their expression is greater than nine. In the case of mixed fractions, the maximum number of displayable digits (including integers) is eight.
- To convert a sexagesimal value to a fraction, first convert it by pressing $\boxed{2\text{ndF}} \boxed{\leftrightarrow\text{DEG}}$.

Binary, Pental, Octal, Decimal, and Hexadecimal Operations (N-base)

Conversions can be performed between N-base numbers in NORMAL mode. The four basic arithmetic operations, calculations with parentheses, and memory calculations can also be performed, along with the logical operations AND, OR, NOT, NEG, XOR, and XNOR on binary, pental, octal, and hexadecimal numbers.

Conversion to each system is performed with the following keys:

- $\boxed{2\text{ndF}} \boxed{\leftrightarrow\text{BIN}}$ (“BIN” appears), $\boxed{2\text{ndF}} \boxed{\leftrightarrow\text{PEN}}$ (“PEN” appears), $\boxed{2\text{ndF}} \boxed{\leftrightarrow\text{OCT}}$ (“OCT” appears), $\boxed{2\text{ndF}} \boxed{\leftrightarrow\text{HEX}}$ (“HEX” appears), $\boxed{2\text{ndF}} \boxed{\leftrightarrow\text{DEC}}$ (“BIN”, “PEN”, “OCT”, and “HEX” disappear)

Note: The hexadecimal numbers A–F are entered by pressing

$\boxed{\text{CNST}}$, $\boxed{y^x}$, $\boxed{x^2}$, $\boxed{\log}$, $\boxed{\ln}$, and $\boxed{(x,y)}$.

In the binary, pental, octal, and hexadecimal systems, fractional parts cannot be entered. When a decimal number having a fractional part is converted into a binary, pental, octal, or hexadecimal number, the fractional part will be truncated. Likewise, when the result of a binary, pental, octal, or hexadecimal calculation includes a fractional part, the fractional part will be truncated. In the binary, pental, octal, and hexadecimal systems, negative numbers are displayed as a complement.


Time, Decimal, and Sexagesimal Calculations

You can convert between decimal and sexagesimal numbers, and from sexagesimal numbers to seconds or minutes. In addition, the four basic arithmetic operations and memory calculations can be performed using the sexagesimal system. Notation for sexagesimal is as follows:

$12^{\circ} 34' 56.78''$
 Degree Minute Second

Coordinate Conversions

- Before performing a calculation, select the angular unit.
- The calculation result is automatically stored in the X and Y memories (r or x in X memory, and θ or y in Y memory).
- The results of coordinate conversions will be displayed as decimal numbers even in the WriteView editor.



*1 based on US survey foot

Physical Constants and Metric Conversions

Calculations using physical constants

To recall a constant, press $\boxed{\text{CNST}}$, then select a physical constant from the list. (Each item is labeled with a 2-digit number.)

- To scroll up or down the list of constants, press $\boxed{\blacktriangle}$ ($\boxed{\blacktriangleleft}$) or $\boxed{\blacktriangledown}$ ($\boxed{\blacktriangleright}$). Use $\boxed{2\text{ndF}} \boxed{\blacktriangle}$ ($\boxed{\blacktriangleleft}$) or $\boxed{2\text{ndF}} \boxed{\blacktriangledown}$ ($\boxed{\blacktriangleright}$) to jump to the first or last page.
- Enter the first digit of the 2-digit item number to jump to the page containing the number that begins with that digit.
- When you enter the second digit, the constant is displayed automatically according to the display and decimal placement settings.
- Physical constants can be recalled in NORMAL (excluding N-base), STAT, CPLX, MATRIX, LIST, and EQUATION modes.
- The following table lists the physical constants. See the calculation example sheet for physical constant symbols and units.

Note: Physical constants and metric conversions are based on the 2006 CODATA recommended values, or on the 1995 Edition of the “Guide for the Use of the International System of Units (SI)” released by NIST (National Institute of Standards and Technology).

No.	Constant	No.	Constant
01	Speed of light in vacuum	27	Stefan-Boltzmann constant
02	Newtonian constant of gravitation	28	Avogadro constant
03	Standard acceleration of gravity	29	Molar volume of ideal gas (273.15 K, 101.325 kPa)
04	Electron mass	30	Molar gas constant
05	Proton mass	31	Faraday constant
06	Neutron mass	32	Von Klitzing constant
07	Muon mass	33	Electron charge to mass quotient
08	Atomic mass unit-kilogram relationship	34	Quantum of circulation
09	Elementary charge	35	Proton gyromagnetic ratio
10	Planck constant	36	Josephson constant
11	Boltzmann constant	37	Electron volt
12	Magnetic constant	38	Celsius Temperature
13	Electric constant	39	Astronomical unit
14	Classical electron radius	40	Parsec
15	Fine-structure constant	41	Molar mass of carbon-12
16	Bohr radius	42	Planck constant over 2 pi
17	Rydberg constant	43	Hartree energy
18	Magnetic flux quantum	44	Conductance quantum
19	Bohr magneton	45	Inverse fine-structure constant
20	Electron magnetic moment	46	Proton-electron mass ratio
21	Nuclear magneton	47	Molar mass constant
22	Proton magnetic moment	48	Neutron Compton wavelength
23	Neutron magnetic moment	49	First radiation constant
24	Muon magnetic moment	50	Second radiation constant
25	Compton wavelength	51	Characteristic impedance of vacuum
26	Proton Compton wavelength	52	Standard atmosphere

Metric conversions

Enter a value to be converted, then press $\boxed{2\text{ndF}} \boxed{\text{CONV}}$, and select a metric conversion by entering its 2-digit number.

- The metric conversion list is used in the same manner as the list of physical constants.
- Unit conversions can be performed in NORMAL (excluding N-base), STAT, MATRIX, LIST, and EQUATION modes.
- The following table lists units used in metric conversion. See the calculation example sheet for the metric conversion reference table.

No.	Remarks	No.	Remarks
01	in : inch	23	fl oz(US) : fluid ounce (US)
02	cm : centimeter	24	mL : milliliter
03	ft : foot	25	fl oz(UK) : fluid ounce (UK)
04	m : meter	26	mL : milliliter
05	yd : yard	27	cal ₁₅ : calorie ₁₅
06	m : meter	28	J : joule
07	mi : mile	29	cal ₁₅ : calorie (15°C)
08	km : kilometer	30	J : joule
09	n mi : nautical mile	31	cal _{IT} : calorie _{IT}
10	m : meter	32	J : joule
11	acre : acre*1	33	hp : horsepower (UK)
12	m ² : square meter	34	W : watt
13	oz : ounce (avoirdupois)	35	ps : horsepower (metric)
14	g : gram	36	W : watt
15	lb : pound (avoirdupois)	37	(kgf/cm ²)
16	kg : kilogram	38	Pa : pascal
17	°F : degree Fahrenheit	39	atm : atmosphere
18	°C : degree Celsius	40	Pa : pascal
19	gal (US) : gallon (US)	41	(1 mmHg = 1 Torr)
20	L : liter	42	Pa : pascal
21	gal (UK) : gallon (UK)	43	(kgf·m)
22	L : liter	44	N·m : newton meter

Calculations Using Engineering Prefixes 17

Calculation can be executed in NORMAL mode (excluding N-base) using the following 9 types of prefixes.

	Prefix	Operation	Unit
k	(kilo)	MATH $\left[\begin{smallmatrix} 3 \\ 0 \end{smallmatrix} \right]$	10^3
M	(Mega)	MATH $\left[\begin{smallmatrix} 3 \\ 1 \end{smallmatrix} \right]$	10^6
G	(Giga)	MATH $\left[\begin{smallmatrix} 3 \\ 2 \end{smallmatrix} \right]$	10^9
T	(Tera)	MATH $\left[\begin{smallmatrix} 3 \\ 3 \end{smallmatrix} \right]$	10^{12}
m	(milli)	MATH $\left[\begin{smallmatrix} 3 \\ 4 \end{smallmatrix} \right]$	10^{-3}
μ	(micro)	MATH $\left[\begin{smallmatrix} 3 \\ 5 \end{smallmatrix} \right]$	10^{-6}
n	(nano)	MATH $\left[\begin{smallmatrix} 3 \\ 6 \end{smallmatrix} \right]$	10^{-9}
p	(pico)	MATH $\left[\begin{smallmatrix} 3 \\ 7 \end{smallmatrix} \right]$	10^{-12}
f	(femto)	MATH $\left[\begin{smallmatrix} 3 \\ 8 \end{smallmatrix} \right]$	10^{-15}

Modify Function 18

Decimal calculation results are internally obtained in scientific notation, with up to 14 digits in the mantissa. However, since calculation results are displayed in the form designated by the display notation and the number of decimal places indicated, the internal calculation result may differ from that shown in the display. By using the modify function ($\text{2ndF} \left[\text{MDF} \right]$), the internal value is converted to match that of the display, so that the displayed value can be used without change in subsequent operations.

- When using the WriteView editor, if the calculation result is displayed using fractions or irrational numbers, press CHANGE to convert it to decimal form first.
- The modify function can be used in NORMAL, STAT, MATRIX, or LIST modes.

Simulation Calculation (ALGB) 19

If you have to find values consecutively using the same expression, such as plotting a curve line for $2x^2 + 1$, or finding the variable values for $2x + 2y = 14$, once you enter the expression, all you have to do is to specify the value for the variable in the equation.

Usable variables: A–F, M, X and Y

- Simulation calculations can only be executed in NORMAL mode.
- Calculation ending instructions other than $\left[= \right]$ cannot be used.

Performing calculations

- Press $\text{MODE} \left[0 \right]$.
- Input an expression with at least one variable.
- Press $\text{MATH} \left[1 \right]$.
- The variable entry screen will appear. Enter a value, then press ENTER to confirm. The calculation result will be displayed after you have entered a value for each variable used in the equation.
 - After completing the calculation, press $\text{MATH} \left[1 \right]$ to perform calculations using the same equation.
 - Variables and numerical values stored in the memories will be displayed in the variable entry screen. If you do not want to change any values, simply press ENTER .
 - Performing simulation calculation will cause values in memory to be overwritten with new values.

Solver Function 20

The solver function finds the value for x that reduces the entered expression to zero.

- This function uses Newton's method to obtain an approximation. Depending on the function (e.g. periodic) or start value, an error may occur (ERROR 02) due to there being no convergence to the solution for the equation.
- The value obtained by this function may include a margin of error. If it is larger than acceptable, recalculate the solution after changing the "Start" and dx values.
- Change the "Start" value (e.g. to a negative value) or dx value (e.g. to a smaller value) if:
 - no solution can be found (ERROR 02).
 - more than two solutions appear to be possible (e.g. a cubic equation).
 - to improve arithmetic precision.
- The calculation result is automatically stored in the X memory.
- Press ON/C to exit the solver function.

Performing solver function

- Press $\text{MODE} \left[0 \right]$.
- Input an expression with an x variable.
- Press $\text{MATH} \left[2 \right]$.
- Enter a "Start" value and press ENTER . The default value is "0".
- Enter a dx value (minute interval).
- Press ENTER .

STATISTICAL CALCULATIONS

Statistical calculations can be performed in STAT mode.

There are eight sub-modes within STAT mode. Press $\text{MODE} \left[1 \right]$, then press the number key that corresponds to your choice:

- $\left[0 \right]$ (S t a t 0 [SD]): Single-variable statistics
- $\left[1 \right]$ (S t a t 1 [LINE]): Linear regression
- $\left[2 \right]$ (S t a t 2 [QUAD]): Quadratic regression
- $\left[3 \right]$ (S t a t 3 [E-EXP]): Euler exponential regression
- $\left[4 \right]$ (S t a t 4 [LOG]): Logarithmic regression
- $\left[5 \right]$ (S t a t 5 [POWER]): Power regression
- $\left[6 \right]$ (S t a t 6 [INV]): Inverse regression
- $\left[7 \right]$ (S t a t 7 [G-EXP]): General exponential regression

Statistical Calculations and Variables 21

The following statistics can be obtained for each statistical calculation (refer to the table below):

Single-variable statistical calculation

Statistics of ① and the value of the normal probability function.

Linear regression calculation

Statistics of ① and ②. In addition, the estimate of y for a given x (estimate y') and the estimate of x for a given y (estimate x').

Quadratic regression calculation

Statistics of ① and ②, and coefficients a , b , c in the quadratic regression formula ($y = a + bx + cx^2$). (For quadratic regression calculations, no correlation coefficient (r) can be obtained.) When there are two x' values, each value will be displayed with "1." or "2.", and stored separately in the X and Y memories.

Euler exponential regression, logarithmic regression, power regression, inverse regression, and general exponential regression calculations

Statistics of ① and ②. In addition, the estimate of y for a given x and the estimate of x for a given y . (Since the calculator converts each formula into a linear regression formula before actual calculation takes place, it obtains all statistics, except coefficients a and b , from converted data rather than entered data.)

①	\bar{x}	Mean of samples (x data)
	s_x	Sample standard deviation (x data)
	σ_x	Population standard deviation (x data)
	n	Number of samples
	Σx	Sum of samples (x data)
	Σx^2	Sum of squares of samples (x data)
②	\bar{y}	Mean of samples (y data)
	s_y	Sample standard deviation (y data)
	σ_y	Population standard deviation (y data)
	Σy	Sum of samples (y data)
	Σy^2	Sum of squares of samples (y data)
	Σxy	Sum of products of samples (x , y)
	r	Correlation coefficient
	a	Coefficient of regression equation
	b	Coefficient of regression equation
c	Coefficient of quadratic regression equation	

- Use ALPHA and RCL to perform a variable calculation in STAT mode.
- CHANGE does not function in STAT mode.

Data Entry and Correction 22

Before entering new data, clear the memory contents ($\text{2ndF} \left[\text{CA} \right]$).

Data entry

Single-variable data

Data $\left[\text{DATA} \right]$

Data $\left(\begin{smallmatrix} x \\ y \end{smallmatrix} \right)$ frequency $\left[\text{DATA} \right]$ (To enter multiples of the same data)

Two-variable data

Data $x \left(\begin{smallmatrix} x \\ y \end{smallmatrix} \right)$ data $y \left[\text{DATA} \right]$

Data $x \left(\begin{smallmatrix} x \\ y \end{smallmatrix} \right)$ data $y \left(\begin{smallmatrix} x \\ y \end{smallmatrix} \right)$ frequency $\left[\text{DATA} \right]$ (To enter multiples of the same data x and y)

Note: Up to 100 data items can be entered. With the single-variable data, a data item without frequency assignment is counted as one data item, while an item assigned with frequency is stored as a set of two data items. With the two-variable data, a set of data items without frequency assignment is counted as two data items, while a set of items assigned with frequency is stored as a set of three data items.

Data correction

Correction before pressing $\left[\text{DATA} \right]$ immediately after a data entry:

Delete incorrect data with ON/C , then enter the correct data.

Correction after pressing $\left[\text{DATA} \right]$:

Use $\left[\blacktriangle \right]$ and $\left[\blacktriangledown \right]$ to display the previously entered data set.

Press $\left[\blacktriangledown \right]$ to display the data set in ascending (oldest first) order. To reverse the display order to descending (latest first), press the $\left[\blacktriangle \right]$ key. Press $\text{2ndF} \left[\blacktriangle \right]$ or $\text{2ndF} \left[\blacktriangledown \right]$ to jump the cursor to the beginning or end of the data set.

Each data set is displayed with "X:", "Y:", or "F:".

DATA SET=4	75.	Data set number
X:	3.	Data x
F:	3.	Frequency

DATA SET=4	21.	Data set number
X:	40.	Data x
Y:	3.	Data y
F:	3.	Frequency

Display and move the cursor to the data item to be modified by using $\left[\blacktriangle \right]$ and $\left[\blacktriangledown \right]$, enter the correct value, then press $\left[\text{DATA} \right]$ or ENTER .

- To delete a data set, display and move the cursor to an item of the data set to delete by using $\left[\blacktriangle \right]$ and $\left[\blacktriangledown \right]$, then press $\text{2ndF} \left[\text{CD} \right]$. The data set will be deleted.
- To add a new data set, press ON/C to exit the display of previously entered data and input the values, then press $\left[\text{DATA} \right]$.

Statistical Calculation Formulas 23

Type	Regression formula
Linear	$y = a + bx$
Quadratic	$y = a + bx + cx^2$
Euler exponential	$y = a \cdot e^{bx}$
Logarithmic	$y = a + b \cdot \ln x$
Power	$y = a \cdot x^b$
Inverse	$y = a + b \cdot \frac{1}{x}$
General exponential	$y = a \cdot b^x$

An error will occur when:

- The absolute value of the intermediate result or calculation result is equal to or greater than 1×10^{100} .
- The denominator is zero.
- An attempt is made to take the square root of a negative number.
- No solution exists in the quadratic regression calculation.

Normal Probability Calculations 24

In STAT mode, the three probability density functions can be accessed under the MATH menu, with a random number used as a normal distribution variable.

Notes:

- $P(t)$, $Q(t)$, and $R(t)$ will always take positive values, even when $t < 0$, because these functions follow the same principle used when solving for an area.
- Values for $P(t)$, $Q(t)$, and $R(t)$ are given to six decimal places.
- The standardization conversion formula is as follows:

$$t = \frac{x - \bar{x}}{\sigma_x}$$

DRILL MODE

Math Drill: $\text{MODE} \left[2 \right] \left[0 \right]$

Math operation questions with positive integers and 0 are displayed randomly. It is possible to select the number of questions and operator type.

Multiplication Table (X Table): $\text{MODE} \left[2 \right] \left[1 \right]$

Questions from each row of the multiplication table (1 to 12) are displayed serially or randomly.

To exit DRILL mode, press MODE and select another mode.

Using Math Drill and X Table

- Press $\text{MODE} \left[2 \right] \left[0 \right]$ for Math Drill or $\text{MODE} \left[2 \right] \left[1 \right]$ for X Table.
- Math Drill:** Use $\left[\blacktriangle \right]$ and $\left[\blacktriangledown \right]$ to select the number of questions (25, 50, or 100).
X Table: Use $\left[\blacktriangle \right]$ and $\left[\blacktriangledown \right]$ to select a row in the multiplication table (1 to 12).
- Math Drill:** Use $\left[\blacktriangleleft \right]$ and $\left[\blacktriangleright \right]$ to select the operator type for questions (+, -, \times , \div , or $+ - \times \div$).
X Table: Use $\left[\blacktriangleleft \right]$ and $\left[\blacktriangleright \right]$ to select the order type ("Serial" or "Random").
- Press ENTER to start.
When using Math Drill or X Table (random order only), questions are randomly selected and will not repeat except by chance.

- Enter your answer. If you make a mistake, press ON/C or BS to clear any entered numbers, and enter your answer again.
- Press ENTER .
 - If the answer is correct, “✔” appears and the next question is displayed.
 - If the answer is wrong, “✘” appears and the same question is displayed. This will be counted as an incorrect answer.
 - If you press ENTER without entering an answer, the correct answer is displayed and then the next question is displayed. This will be counted as an incorrect answer.
- Continue answering the series of questions by entering the answer and pressing ENTER .
- After you finish, press ENTER and the number and percentage of correct answers are displayed.
- Press ENTER to return to the initial screen for your current drill.

Math Drill sample

Q 1/25 — Current question/
Total questions

➔ 13+9=_ — Question

⋮

Q 8/25 — See step 6 above.

✔ 48÷5=8
✘ 7×11=7
➔ 7×11=_

⋮

Math Drill — Number of questions
Question:25 — Operator type
Type:+-×÷
✔ : 20 (80%) — Percentage correct
Correct answers

× Table sample

✘ Table 12 — Total remaining questions

➔ 7×1=_ — Question

⋮

✘ Table 8 — See step 6 above.

✔ 7×4=28
✘ 7×5=35
➔ 7×5=_

⋮

✘ Table — Multiplicand
Multiply by:07 — Order type
Type:Serial
✔ : 8 (67%) — Percentage correct
Correct answers

Ranges of Math Drill Questions

The range of questions for each operator type is as follows.

- +** **Addition operator:** “0 + 0” to “20 + 20”
- −** **Subtraction operator:** “0 − 0” to “20 − 20”; answers are positive integers and 0.
- ×** **Multiplication operator:** “1 × 0” or “0 × 1” to “12 × 12”
- ÷** **Division operator:** “0 ÷ 1” to “144 ÷ 12”; answers are positive integers from 1 to 12 and 0, dividends of up to 144, and divisors of up to 12.
- + − × ÷** **Mixed operators:** Questions within all the above ranges are displayed.

COMPLEX NUMBER CALCULATIONS

To carry out addition, subtraction, multiplication, and division using complex numbers, press MODE 3 to select CPLX mode.

Results of complex number calculations are expressed using two systems:

- 2ndF →xy : Rectangular coordinate system (The $x+iy$ symbol appears.)
- 2ndF →rθ : Polar coordinate system (The $r∠θ$ symbol appears.)

Complex Number Entry

- Rectangular coordinates
 x -coordinate + y -coordinate i
 or x -coordinate + i y -coordinate
 - Polar coordinates
 r ∠ $θ$
 r : absolute value $θ$: argument
- On selecting another mode, the imaginary part of any complex number stored in the independent memory (M) and the last answer memory (ANS) will be cleared.

- A complex number expressed in rectangular coordinates with the y -value equal to zero, or expressed in polar coordinates with the angle equal to zero, is treated as a real number.
- Press MATH 1 to return the complex conjugate of the specified complex number.

MATRIX CALCULATIONS

You can store and calculate up to four matrices containing up to four rows and four columns each in MATRIX mode.

MATRIX MODE

Press MODE 4 to enter MATRIX mode.

Note: You can use the MATH menu in MATRIX mode to edit, recall, and store matrices, as well as to call matrix-specific functions.

Entering and Storing Matrices

Before performing matrix calculations, a matrix must be created. Follow the steps below to enter and store matrices.

- Press MODE 4 to enter MATRIX mode.
- Press MATH 2 to bring up the matrix entry screen.
 - Any matrix data remaining in the buffer, along with any previously entered, loaded, or calculated matrix data, will be displayed.
- Define the matrix dimensions (up to four rows by four columns) by entering the required dimensions using the number keys and pressing ENTER .

Matrix dimensions (row × column)

Element fields

Entry field

Matrix entry screen (example)

- Enter each element in the matrix by entering a value in the entry field and pressing ENTER .
 - Each matrix element can display up to seven digits (the decimal point counts as one digit). If an element exceeds seven digits in length, it may be displayed in exponent notation within the matrix.
 - A maximum of three rows by three columns can be displayed at one time. Use ▲ , ▼ , ◀ , and ▶ to move the cursor through the matrix.
- When you have entered a value for each element, press ON/C to exit the matrix entry screen.
- Press MATH 4 and select a memory (matA–matD) to store the newly-created matrix in.

Modifying a stored matrix

- To load a stored matrix into the matrix entry screen, press MATH 3 , then select the memory (matA–matD) that holds the matrix you wish to modify.
 - Loading new data into the screen will automatically replace any data that may already exist there.
- Using the matrix entry screen, you can modify the values of elements in the matrix. Assign new values wherever necessary and press ENTER after each one.
 - If you wish to modify the number of rows or columns, first press ON/C MATH 2 . You can then enter new values for the matrix dimensions.
- When you have finished making changes, press ON/C to exit the matrix entry screen.
- Press MATH 4 and select a memory (matA–matD) to store the newly-created matrix in.

Using Matrices in Calculations

Matrices stored in memories (matA–matD) can be used in arithmetic calculations (with the exception of division between matrices) and calculations that use x^3 , x^2 , and x^{-1} . You can also use the following matrix-specific functions that are available in the MATH menu.

dim (matrix name, row, column)	Returns a matrix with dimensions changed as specified.
fill (value, row, column)	Fills each element with a specified value.
cumul matrix name	Returns the cumulative matrix.
aug (matrix name, matrix name)	Appends the second matrix to the first matrix as new columns. The first and second matrices must have the same number of rows.
identity value	Returns the identity matrix with specified value of rows and columns.
rnd_mat (row, column)	Returns a random matrix with specified values of rows and columns.
det matrix name	Returns the determinant of a square matrix.

trans <i>matrix name</i>	Returns the matrix with the columns transposed to rows and the rows transposed to columns.
mat→list (MATH) (7)	Creates lists with elements from the left column of each matrix. (matA→L1, matB→L2, matC→L3, matD→L4) Mode changes from MATRIX mode to LIST mode.
matA→list (MATH) (8)	Creates lists with elements from each column of the matrix. (matA→L1, L2, L3, L4) Mode changes from MATRIX mode to LIST mode.

Notes:

- When the matrix entry screen is displayed, you cannot perform matrix calculations because the MATH menu is not available.
- If the calculation result is a matrix, it will be displayed in the matrix entry screen (note that this replaces any existing data in the buffer). To store the calculation result, first press **(ON/C)** to exit the matrix entry screen. Press **(MATH) (4)** and select a memory (matA–matD) to store the newly-created matrix in.
- When the calculation results are in matrix form, pressing neither **(◀)** nor **(▶)** will bring you back to the original expression.

LIST CALCULATIONS

You can store and calculate up to four lists of up to sixteen elements each in LIST mode.

LIST MODE


Press **(MODE) (5)** to enter LIST mode.

Note: You can use the MATH menu in LIST mode to edit, recall, and store lists, as well as to call list-specific functions.

Entering and Storing Lists

Before performing list calculations, a list must be created. Follow the steps below to enter and store lists.

- Press **(MODE) (5)** to enter LIST mode.
- Press **(MATH) (2)** to bring up the list entry screen.
 - Any list data remaining in the buffer, along with any previously entered, loaded, or calculated list data, will be displayed.
- Define the list size (up to sixteen elements) by entering a value using the number keys and pressing **(ENTER)**.



List entry screen (example)

- Enter each element in the list by entering a value in the entry field and pressing **(ENTER)**.
 - Each list element can display up to eight digits (the decimal point counts as one digit). If an element exceeds eight digits in length, it will be displayed in exponent notation within the list.
 - A maximum of six elements can be displayed at one time. Use **(▲)**, **(▼)**, **(◀)**, and **(▶)** to move the cursor through the list.
- When you have entered a value for each element, press **(ON/C)** to exit the list entry screen.
- Press **(MATH) (4)** and select a memory (L1–L4) to store the newly-created list in.

Modifying a stored list

- To load a stored list into the list entry screen, press **(MATH) (3)**, then select the memory (L1–L4) that holds the list you wish to modify.
 - Loading new data into the screen will automatically replace any data that may already exist there.
- Using the list entry screen, you can modify the values of elements in the list. Assign new values wherever necessary and press **(ENTER)** after each one.
 - If you wish to modify the size of a list, first press **(ON/C)** **(MATH) (2)**. You can then enter new values for the list size.
- When you have finished making changes, press **(ON/C)** to exit the list entry screen.
- Press **(MATH) (4)** and select a memory (L1–L4) to store the newly-created list in.

Using Lists in Calculations

Lists stored in memories (L1–L4) can be used in arithmetic calculations and calculations that use x^3 , x^2 , and x^{-1} . You can also use the following list-specific functions that are available in the MATH menu.

sortA <i>list name</i>	Sorts list in ascending order.
sortD <i>list name</i>	Sorts list in descending order.
dim (<i>list name, size</i>)	Returns a list with size changed as specified.
fill (<i>value, size</i>)	Enters the specified value for all items.
cumul <i>list name</i>	Sequentially cumulates each item in the list.
df_ <i>list name</i>	Returns a new list using the difference between adjacent items in the list.
aug (<i>list name, list name</i>)	Returns a list appending the specified lists.
min <i>list name</i>	Returns the minimum value in the list.
max <i>list name</i>	Returns the maximum value in the list.
mean <i>list name</i>	Returns the mean value of items in the list.
med <i>list name</i>	Returns the median value of items in the list.
sum <i>list name</i>	Returns the sum of items in the list.
prod <i>list name</i>	Returns the multiplication of items in the list.
stdDv <i>list name</i>	Returns the standard deviation of the list.
vari <i>list name</i>	Returns the variance of the list.
o_prod (<i>list name, list name</i>)	Returns the outer product of 2 lists (vectors).
i_prod (<i>list name, list name</i>)	Returns the inner product of 2 lists (vectors).
abs_ <i>list name</i>	Returns the absolute value of the list (vector).
list→mat (MATH) (7)	Creates matrices with left column data from each list. (L1→matA, L2→matB, L3→matC, L4→matD) Mode changes from LIST mode to MATRIX mode.
list→matA (MATH) (8)	Creates a matrix with column data from each list. (L1, L2, L3, L4→matA) Mode changes from LIST mode to MATRIX mode.

Notes:

- When the list entry screen is displayed, you cannot perform list calculations because the MATH menu is not available.
- If the calculation result is a list, it will be displayed in the list entry screen (note that this replaces any existing data in the buffer). To store the calculation result, first press **(ON/C)** to exit the list entry screen. Press **(MATH) (4)** and select a memory (L1–L4) to store the newly-created list in.
- When the calculation results are in list form, pressing neither **(◀)** nor **(▶)** will bring you back to the original expression.

EQUATION SOLVERS

The results obtained by these functions may include a margin of error.

Simultaneous Linear Equations

Simultaneous linear equations with two unknowns (2-VLE) or with three unknowns (3-VLE) may be solved using the following functions.

① 2-VLE: **(MODE) (6) (0)**

$$\begin{cases} a_1x + b_1y = c_1 \\ a_2x + b_2y = c_2 \end{cases} \quad |D| = \begin{vmatrix} a_1 & b_1 \\ a_2 & b_2 \end{vmatrix}$$

② 3-VLE: **(MODE) (6) (1)**

$$\begin{cases} a_1x + b_1y + c_1z = d_1 \\ a_2x + b_2y + c_2z = d_2 \\ a_3x + b_3y + c_3z = d_3 \end{cases} \quad |D| = \begin{vmatrix} a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \\ a_3 & b_3 & c_3 \end{vmatrix}$$

- If the determinant $D = 0$, an error occurs.
- If the absolute value of an intermediate result or calculation result is 1×10^{100} or more, an error occurs.

Solving simultaneous linear equations

- Press **(MODE) (6) (0)** or **(MODE) (6) (1)**.
- Enter the value for each coefficient (a_1 , etc.).
 - Coefficients can be entered using ordinary arithmetic operations.
 - To clear the entered coefficient, press **(ON/C)**.
 - Press **(▲)** or **(▼)** to move the cursor up or down through the coefficients. Press **(2ndF) (▲)** or **(2ndF) (▼)** to jump to the first or last coefficient.
- When all coefficients have been entered, press **(ENTER)** to solve the equation.
 - While the solution is displayed, press **(ENTER)** or **(ON/C)** to return to the coefficient entry display. To clear all the coefficients, press **(2ndF) (CA)**.

Quadratic and Cubic Equations

Quadratic ($ax^2 + bx + c = 0$) or cubic ($ax^3 + bx^2 + cx + d = 0$) equations may be solved using the following functions.

① Quadratic equation solver: **(MODE) (6) (2)**

② Cubic equation solver: **(MODE) (6) (3)**

Solving quadratic and cubic equations

- Press **(MODE) (6) (2)** or **(MODE) (6) (3)**.
- Coefficients for these equations can be entered in the same manner as those for simultaneous linear equations.

ERRORS AND CALCULATION RANGES

Errors

An error will occur if an operation exceeds the calculation ranges, or if a mathematically illegal operation is attempted. When an error occurs, pressing **(◀)** or **(▶)** automatically moves the cursor back to the place in the equation where the error occurred. Edit the equation or press **(ON/C)** or **(2ndF) (CA)** to clear the equation.

Error codes and error types

ERROR 01: Syntax error

- An attempt was made to perform an invalid operation.
Ex. $2 (+) (-) 5 (=)$

ERROR 02: Calculation error

- The absolute value of an intermediate or final calculation result equals or exceeds 10^{100} .
- An attempt was made to divide by zero (or an intermediate calculation resulted in zero).
- The calculation ranges were exceeded while performing calculations.

ERROR 03: Nesting error

- The available number of buffers was exceeded. (There are 10 buffers* for numeric values and 64 buffers for calculation instructions).

* 5 buffers in CPLX mode, and 1 buffer for matrix/list data.

ERROR 04: Data over error

- Data items exceeded 100 in STAT mode.

ERROR 07: Definition error

- Matrix/List definition error or the attempted entering of an invalid value.

ERROR 08: DIM unmatched error

- Matrix/List dimensions inconsistent while calculating.

ERROR 09: Invalid DIM error

- Size of matrix/list exceeds calculation range.

ERROR 10: Undefined error

- Undefined matrix/list used in calculation.

Alert Messages

Cannot delete!

- The selected item cannot be deleted by pressing **(BS)** or **(2ndF) (DEL)** in the WriteView editor.
Ex. **(2ndF) (√) 5 (▶) (x²) (◀) (BS)**

In this example, delete the exponent before attempting to delete the parentheses.

Cannot call!

- The function or operation stored in definable memory (D1 to D4) cannot be called.
Ex. An attempt was made to recall a statistical variable from within NORMAL mode.
- Expressions stored in formula memories (F1 to F4) cannot be called.

Buffer full!

- The equation (including any calculation ending instructions) exceeded its maximum input buffer (159 characters in the WriteView editor or 161 characters in the Line editor). An equation may not exceed its maximum input buffer.

Calculation Ranges

30

- Within the ranges specified, this calculator is accurate to ± 1 of the 10th digit of the mantissa. However, a calculation error increases in continuous calculations due to accumulation of each calculation error. (This is the same for y^x , $x\sqrt{\quad}$, $n!$, e^x , \ln , Matrix/List calculations, etc., where continuous calculations are performed internally.) Additionally, a calculation error will accumulate and become larger in the vicinity of inflection points and singular points of functions.

Calculation ranges

$\pm 10^{-99}$ to $\pm 9.999999999 \times 10^{99}$ and 0.

If the absolute value of an entry or a final or intermediate result of a calculation is less than 10^{-99} , the value is considered to be 0 in calculations and in the display.

Display of results using $\sqrt{\quad}$

Calculation results may be displayed using $\sqrt{\quad}$ when all of the following conditions are met:

- When intermediate and final calculation results are displayed in the following form:

$$\pm \frac{a\sqrt{b}}{e} \pm \frac{c\sqrt{d}}{f}$$

- When each coefficient falls into the following ranges:

$1 \leq a < 100$; $1 < b < 1,000$; $0 \leq c < 100$;

$1 \leq d < 1,000$; $1 \leq e < 100$; $1 \leq f < 100$

- When the number of terms in the intermediate and final calculation results is one or two.

Note: The result of two fractional terms that include $\sqrt{\quad}$ will be reduced to a common denominator.

BATTERY REPLACEMENT

Notes on Battery Replacement

Improper handling of batteries can cause electrolyte leakage or explosion. Be sure to observe the following handling rules:

- Make sure the new battery is the correct type.
- When installing, orient the battery properly as indicated in the calculator.
- The battery is factory-installed before shipment, and may be exhausted before it reaches the service life stated in the specifications.

Notes on erasure of memory contents

When the battery is replaced, the memory contents are erased. Erasure can also occur if the calculator is defective or when it is repaired. Make a note of all important memory contents in case accidental erasure occurs.

When to Replace the Battery



If the display has poor contrast or nothing appears on the display when $\overline{\text{ON/C}}$ is pressed in dim lighting, even after adjusting the display contrast, it is time to replace the battery.

Cautions


- An exhausted battery left in the calculator may leak and damage the calculator.
- Fluid from a leaking battery accidentally entering an eye could result in serious injury. Should this occur, wash with clean water and immediately consult a doctor.
- Should fluid from a leaking battery come in contact with your skin or clothes, immediately wash with clean water.
- If the product is not to be used for some time, to avoid damage to the unit from a leaking battery, remove it and store in a safe place.
- Do not leave an exhausted battery inside the product.
- Keep batteries out of the reach of children.
- Explosion risk may be caused by incorrect handling.
- Do not throw batteries into a fire as they may explode.

Replacement Procedure

1. Turn the power off by pressing $\overline{\text{2ndF}}$ $\overline{\text{OFF}}$.
2. Remove the two screws. (Fig. 1)
3. Slide the battery cover slightly and lift it to remove.
4. Remove the used battery by prying it out with a ball-point pen or other similar pointed device. (Fig. 2)
5. Install one new battery. Make sure the "+" side is facing up.
6. Replace the cover and screws.
7. Press the RESET switch (on the back) with the tip of a ball-point pen or similar object.
8. Adjust the display contrast. See "Adjusting the Display Contrast".



- Make sure that the display appears as shown below. If the display does not appear as shown, remove the battery, reinstall it, and check the display once again.



Automatic Power Off Function

This calculator will turn itself off to save battery power if no key is pressed for approximately 10 minutes.

SPECIFICATIONS

Calculation features:	Scientific calculations, complex number calculations, equation solvers, statistical calculations, etc.
Drill features:	Math Drill and Multiplication Table
Display:	96 × 32 dot matrix liquid crystal display
Display of calculation results:	Mantissa: 10 digits Exponent: 2 digits
Internal calculations:	Mantissas of up to 14 digits
Pending operations:	64 calculations 10 numeric values (5 numeric values in CPLX mode, and 1 numeric value for Matrix/List data.)
Power source:	Built-in solar cells 1.5 V $\overline{\text{---}}$ (DC): Backup battery (Alkaline battery (LR44 or equivalent) × 1)
Operating time:	Approx. 3,000 hours when continuously displaying 55555. at 25°C (77°F), using the alkaline battery only
Operating temperature:	0°C–40°C (32°F–104°F)
External dimensions:	79.6 mm (W) × 161.5 mm (D) × 15.5 mm (H) 3-1/8" (W) × 6-11/32" (D) × 5/8" (H)
Weight:	Approx. 102 g (0.23 lb) (including battery)
Accessories:	Battery × 1 (installed), operation manual, calculation examples, and hard case

FOR MORE INFORMATION ABOUT SCIENTIFIC CALCULATORS

Visit our Web site.

<http://sharp-world.com/calculator/>

SHARP
SHARP CORPORATION

CALCULATION EXAMPLES
EXEMPLES DE CALCUL
ANWENDUNGSBEISPIELE
EJEMPLOS DE CÁLCULO
ESEMPLI DI CALCOLO
REKENVOORBEELDEN
PÉLDASZÁMÍTÁSOK
PŘÍKLADY VÝPOČTŮ
RÄKNEEXEMPEL
LASKENTAESIMERKKEJÄ
UDREGNINGSEKSEMPLER

ตัวอย่างการคำนวณ

نماذج للحسابات

CONTOH-CONTOH PERHITUNGAN

계산 예

SHARP CORPORATION

PRINTED IN CHINA / IMPRIMÉ EN CHINE / IMPRESO EN CHINA
07HGK (TINSZ1308EHZZ)

1 SET UP

100000 ÷ 3 =

[NORM1] ON/C 100000 ÷ 3 = 33'333.33333

→ [FIX: TAB 2] 2ndF [SET UP] 1 0 2 = 33'333.33

→ [SCI: SIG 2] 2ndF [SET UP] 1 1 2 = 3.3E04

→ [ENG: TAB 2] 2ndF [SET UP] 1 2 2 = 33.33E03

→ [NORM1] 2ndF [SET UP] 1 3 = 33'333.33333

3 ÷ 1000 =

[NORM1] ON/C 3 ÷ 1000 = 0.003

→ [NORM2] 2ndF [SET UP] 1 4 = 3.E-03

→ [NORM1] 2ndF [SET UP] 1 3 = 0.003

2 CHANGE

$\frac{2}{5} + \frac{3}{4} =$

ON/C 2 a/b 5 = 0.4

+ a/b 3 = 0.75

= 1.15

CHANGE 1.15

CHANGE 1.15

CHANGE 1.15

$\sqrt{3} \times \sqrt{5} =$

2ndF √ 3 = 1.732

2ndF √ 5 = 2.236

× = 3.872983346

CHANGE 3.872983346

$\sqrt{2} + 3 + \sqrt{5} \div 5 =$

2ndF √ 2 = 1.414

+ 3 = 4.414

2ndF √ 5 = 2.236

÷ 5 = 0.447

= 4.861

CHANGE 4.861

sin 45 =

sin 45 = 0.707106781

CHANGE 0.707106781

$2\cos^{-1} 0.5$ [rad] =

2ndF [SET UP] 0 1 = 1.107148717

2ndF [COS⁻¹] 0.5 = 1.107148717

CHANGE 1.107148717

CHANGE 2.214297434

3

2ndF [CA] 0.

① 3(5 + 2) =

3 () 5 (+) 2 () = 21.

② 3 × 5 + 2 =

3 (×) 5 (+) 2 = 17.

③ (5 + 3) × 2 =

() 5 (+) 3 () (×) 2 = 16.

→ ① 2ndF [▲] 21.

→ ② ▼ 17.

→ ③ ▼ 16.

→ ② ▲ 17.

4 + - × ÷ () () () Exp

45 + 285 ÷ 3 =

ON/C 45 + 285 ÷ 3 = 140.

(18 + 6) ÷ (15 - 8) =

() 18 (+) 6 () (÷)

() 15 (-) 8 () = 3.37

42 × -5 + 120 =

42 (×) (-) 5 (+) 120 = -90

(5 × 10³) ÷ (4 × 10⁻³) =

5 [Exp] 3 (÷)

4 [Exp] (-) 3 = 1'250'000.

5

34 + 57 = 91.

45 + 57 = 102.

68 × 25 = 1'700.

68 × 40 = 2'720.

6

2ndF [M-CLR] 0.

sin 60 [°] =

ON/C [sin] 60 = 0.866025403

CHANGE 0.866025403

$\cos \frac{\pi}{4}$ [rad] =

2ndF [SET UP] 0 1 = 0.707106781

2ndF [cos] 2ndF [π] a/b 4 = 0.707106781

CHANGE 0.707106781

\tan^{-1} [g] =

2ndF [SET UP] 0 2 = 50.

2ndF [tan⁻¹] 1 = 50.

2ndF [SET UP] 0 0

(cosh 1.5 + sinh 1.5)² =

ON/C () [hyp] [cos]

1.5 (+) [hyp] [sin]

1.5 () [X²] = 20.08553692

$\tanh^{-1} \frac{5}{7} =$

2ndF [arc hyp] [tan] ()

5 (÷) 7 () = 0.895879734

ln 20 = 2.995732274

log 50 = 1.698970004

log₂ 16384 = 14.

LINE 2ndF [log_aX] 2 (()) 16384 () = 14.

e³ = 20.08553692

1 ÷ e = 0.367879441

10^{1.7} = 50.11872336

$\frac{1}{6} + \frac{1}{7} =$

6 2ndF [X⁻¹] + 7

2ndF [X⁻¹] = 0.309523809

CHANGE 0.309523809

8⁻² - 3⁴ × 5² =

8 [Y^X] (-) 2 = 0.15625

- 3 [Y^X] 4 = -81

× 5 [X²] = -2024.6375

CHANGE -2024.6375

CHANGE -2024.984375

LINE

8 [Y^X] (-) 2 = 0.15625

3 [Y^X] 4 = 81

× 5 [X²] = -2024.984375

CHANGE -2024.984375

CHANGE -2024.6375

CHANGE -129599.64

(12³)^{1/4} =

() 12 [Y^X] 3 = 1728

[] [Y^X] 4 = 6.447419591

1 a/b 4 = 6.447419591

LINE

8³ = 512.

$\sqrt{49} - 4\sqrt{81} =$

2ndF [√] 49 = 7

2ndF [√] 81 = 9

- 4 = 4.

LINE

2ndF [√] 49 = 7

2ndF [√] 81 = 9

- 4 = 4.

$\sqrt[3]{27} =$

2ndF [√] 27 = 3.

4! = 24.

10P₃ = 720.

⁵C₂ = 10.

500 × 25% = 125.

120 ÷ 400 = ?%

120 (÷) 400 2ndF [%] = 30.

500 + (500 × 25%) = 625.

400 - (400 × 30%) = 280.

|5 - 9| = 4.

LINE

2ndF [abs] () 5 (-) 9 () = 4.

- The range of the results of inverse trigonometric functions
- Plage des résultats des fonctions trigonométriques inverses
- Der Ergebnisbereich für inverse trigonometrische Funktionen
- El rango de los resultados de funciones trigonométricas inversas
- Gama dos resultados das trigonometrias inversas
- La gamma dei risultati di funzioni trigonometriche inverse
- Het bereik van de resultaten van inverse trigonometrie
- Az inverz trigonometriai funkciók eredmény-tartománya
- Rozsah výsledků inverzních trigonometrických funkcí
- Omfang for resultatene av omvendte trigonometriske funksjoner
- Käänteisten trigonometristen funktioiden tulosten alue
- Område for resultatene av omvendte trigonometriske funksjoner
- พื้นที่ของผลลัพธ์ของฟังก์ชันตรีโกณมิติกลับด้าน
- نطاق نتائج الدوال المثلثية المعكوسة

• Kisaran hasil fungsi trigonometri inversi

• 역삼각함수 결과 범위

	$\theta = \sin^{-1} x, \theta = \tan^{-1} x$	$\theta = \cos^{-1} x$
DEG	$-90 \leq \theta \leq 90$	$0 \leq \theta \leq 180$
RAD	$-\frac{\pi}{2} \leq \theta \leq \frac{\pi}{2}$	$0 \leq \theta \leq \pi$
GRAD	$-100 \leq \theta \leq 100$	$0 \leq \theta \leq 200$

7 $\int dx$ $\frac{d}{dx}$

$\int_2^8 (x^2 - 5) dx$

ON/C [f dx] 2 [▲] 8 [▶]

[ALPHA] X X² (-) 5 = 138.

n = 100 =

n = 10 =

LINE ON/C [f dx] [ALPHA] X X² (-) 5

() 2 () 8 () = 138.

() 10 () = 138.

$-\int_{-1}^1 (x^2 - 1) dx$

(-) [f dx] (-) 1 [▲] 1 [▶]

[ALPHA] X X² (-) 1 [▶] +

$+\int_1^3 (x^2 - 1) dx =$

[f dx] 1 [▲] 3 [▶] [ALPHA] X X²

(-) 1 = 8.

$\frac{d(x^4 - 0.5x^3 + 6x^2)}{dx}$ 2ndF $\frac{d/dx}{dx}$ ALPHA X x^4 4 x^3 0.5 ALPHA X x^2 6 ALPHA X x^2 50.

$\frac{dx}{dx} = 0.00002$ 2 = 50.

$\frac{dx}{dx} = 0.001$ 3 130.5000029

LINE

2ndF $\frac{d/dx}{dx}$ ALPHA X x^4 4
 - 0.5 ALPHA X x^3 2ndF x^3
 + 6 ALPHA X x^2 x^2 (x,y) 2
) = 50.

3 130.5000029

8 Σ

$\sum_{x=1}^5 (x+2)$ ON/C 2ndF Σ 1 5 29

$n=1$ = 29

$n=2$ 2 = 15

LINE

ON/C 2ndF Σ ALPHA X + 2 29

2 = 15

9 DRG

$90^\circ \rightarrow [\text{rad}]$ ON/C 90 2ndF DRG $\frac{1}{2}\pi$

$\rightarrow [g]$ 2ndF DRG 100.

$\rightarrow [^\circ]$ 2ndF DRG 90.

$\sin^{-1} 0.8 = [^\circ]$ 2ndF \sin^{-1} 0.8 = 53.13010235

$\rightarrow [\text{rad}]$ 2ndF DRG 0.927295218

$\rightarrow [g]$ 2ndF DRG 59.03344706

$\rightarrow [^\circ]$ 2ndF DRG 53.13010235

10 ALPHA RCL STO M+ M- ANS F1 F2 F3
 F4 D1 D2 D3 D4

$8 \times 2 \Rightarrow M$ ON/C 8 \times 2 STO M 16.

$24 \div (8 \times 2) =$ 24 \div ALPHA M = $1\frac{1}{2}$

$(8 \times 2) \times 5 =$ ALPHA M \times 5 = 80.

$0 \Rightarrow M$ ON/C STO M 0.

$\$150 \times 3 \Rightarrow M_1$ 150 \times 3 M+ 450.

$+) \$250: M_1 + 250 \Rightarrow M_2$ 250 M+ 250.

$-) M_2 \times 5\%$ RCL M \times 5 2ndF % 35.

$M =$ RCL M 665.

$\$1 = \yen110 (110 \Rightarrow Y)$ 110 STO Y 110.

$\yen26,510 = \$?$ 26510 \div ALPHA Y = 241.

$\$2,750 = \yen?$ 2750 \times ALPHA Y = 302'500.

$r = 3 \text{ cm } (r \Rightarrow Y)$ 3 STO Y 3.


$\pi r^2 = ?$ 2ndF π ALPHA Y x^2 = 28.27433388

$\frac{24}{4+6} = 2\frac{2}{5} \dots (A)$ 24 \div () 4 + 6 = $2\frac{2}{5}$

$3 \times (A) + 60 \div (A) =$ 3 \times ALPHA ANS + 60 \div ALPHA ANS = $32\frac{1}{5}$

$\pi r^2 \Rightarrow F1$ 2ndF π ALPHA Y x^2 STO F1 $\Rightarrow F1$

$r = 3 \text{ cm } (r \Rightarrow Y)$ 3 STO Y 3.

 $V = ?$ RCL F1 \times 4 \div 3 = CHANGE 37.69911184

$\sinh^{-1} \Rightarrow D1$ STO D1 2ndF arc hyp sin 0.481211825

$\sinh^{-1} 0.5 =$ D1 0.5 = 0.481211825

11

$6 + 4 = \text{ANS}$ ON/C 6 + 4 = 10.

$\text{ANS} + 5 =$ + 5 = 15.

$8 \times 2 = \text{ANS}$ 8 \times 2 = 16.

$\text{ANS}^2 =$ x^2 = 256.

$44 + 37 = \text{ANS}$ 44 + 37 = 81.

$\sqrt{\text{ANS}} =$ 2ndF $\sqrt{\quad}$ = 9.

12 a/b ab/c

$3\frac{1}{2} + \frac{4}{3} =$ ON/C 3 2ndF a/b/c 1 2 + a/b 4 3 = $4\frac{5}{6}$

CHANGE 29/6

CHANGE 4.833333333

LINE

3 a/b 1 a/b 2 + 4 a/b 3 = 4r5r6*

CHANGE 29r6

CHANGE 4.833333333

$10^{\frac{2}{3}} =$ 2ndF 10^x 2 a/b 3 = 4.641588834

$(\frac{7}{5})^5 =$ 7 a/b 5 y^x 5 = $\frac{16807}{3125}$

LINE 7 a/b 5 y^x 5 = 16807r3125

$3\sqrt{\frac{1}{8}} =$ 2ndF $\sqrt[3]{\quad}$ 1 a/b 8 = $\frac{1}{2}$

$\sqrt{\frac{64}{225}} =$ 2ndF $\sqrt{\quad}$ 64 a/b 225 = $\frac{8}{15}$

$\frac{2^3}{3^4} =$ 2 2ndF x^3 a/b 3 y^x 4 = $\frac{8}{81}$

LINE 2 2ndF x^3 a/b () 3 y^x 4 = 8r81

$\frac{1.2}{2.3} =$ 1.2 a/b 2.3 = $\frac{12}{23}$

$\frac{1^\circ 2' 3''}{2} =$ 1 D \overline{M} S 2 D \overline{M} S 3 a/b 2 = $0^\circ 31' 1.5''$

$\frac{1 \times 10^3}{2 \times 10^3} =$ 1 Exp 3 a/b 2 Exp 3 = $\frac{1}{2}$

$7 \Rightarrow A$ ON/C 7 STO A 7.

$\frac{4}{A} =$ 4 a/b ALPHA A = $\frac{4}{7}$

$1.25 + \frac{2}{5} =$ 1.25 + 2 a/b 5 = $1\frac{13}{20}$

CHANGE 33/20

CHANGE 1.65

LINE 1.25 + 2 a/b 5 = 1.65

CHANGE 1r13r20

CHANGE 33r20

* $4r5r6 = 4\frac{5}{6}$

13 **←BIN** **←PEN** **←OCT** **←HEX** **←DEC** **←NEG** **←NOT** **←AND**
OR **XOR** **XNOR**

DEC (25) → BIN **ON/C** **2ndF** **←DEC** 25 **2ndF** **←BIN** BIN 11001

HEX (1AC) **2ndF** **←HEX** 1 A C

→ BIN **2ndF** **←BIN** BIN 110101100

→ PEN **2ndF** **←PEN** PEN 3203

→ OCT **2ndF** **←OCT** OCT 654

→ DEC **2ndF** **←DEC** 428.

(1010 – 100) **2ndF** **←BIN** ()
 × 11 = 1010 ()
 [BIN] 100 () × 11 = 10010 BIN 10010

BIN (111) → NEG **NEG** 111 (=) BIN 111111001

HEX (1FF) + OCT (512) = **2ndF** **←HEX** 1 F F **2ndF** **←OCT** + 5 1 2 (=) OCT 1511

HEX (?) **2ndF** **←HEX** HEX 349

2FEC – 2C9E → M1 **ON/C** **STO** **M** **2ndF** **←HEX** 2 F E C **2ndF** **←HEX** 2 C 9 E **M+** HEX 34E

+) 2000 – 1901 → M2 **2000** () **1901** () **M+** HEX 6FF

M = **RCL** **M** **ON/C** **STO** **M** HEX A4D

1011 AND 101 = **2ndF** **←BIN** 1011 **AND** 101 (=) BIN 1

5A OR C3 = **2ndF** **←HEX** 5 A **OR** C 3 (=) HEX DB

NOT 10110 = **2ndF** **←BIN** **NOT** 10110 (=) BIN 1111101001

24 XOR 4 = **2ndF** **←OCT** 24 **XOR** 4 (=) OCT 20

B3 XNOR 2D = **2ndF** **←HEX** B3 **XNOR** 2 D (=) HEX FFFFFFFF61

→ DEC **2ndF** **←DEC** -159.

14 **D°M'S** **↔DEG**

7°31'49.44" → [10] **ON/C** 7 **D°M'S** 31 **D°M'S** 49.44 **2ndF** **↔DEG** 7 663 1250

123.678 → [60] 123.678 **2ndF** **↔DEG** 123°40'40.8"

3h 30m 45s + 6h 45m 36s = [60] **3** **D°M'S** 30 **D°M'S** 45 **+** **6** **D°M'S** 45 **D°M'S** 36 (=) 10°16'21."

1234°56'12" + 0°0'34.567" = [60] **1234** **D°M'S** 56 **D°M'S** 12 **+** **0** **D°M'S** 0 **D°M'S** 34.567 (=) 1234°56'47."

3h 45m – 1.69h = [60] **3** **D°M'S** 45 **–** 1.69 (=) **2**°3'36."

sin 62°12'24" = [10] **sin** **62** **D°M'S** 12 **D°M'S** 24 (=) 0.884635235

24° → ["] **24** **D°M'S** **MATH** **4** 86'400.

1500" → ['] **0** **D°M'S** **0** **D°M'S** 1500 **MATH** **5** 25.

15 **→rθ** **→xy** **(x,y)**

$\begin{pmatrix} x=6 \\ y=4 \end{pmatrix} \rightarrow \begin{pmatrix} r=7.211102551 \\ \theta=33.69006753 \end{pmatrix}$ **ON/C** **6** **(x,y)** 4 **r:** 7.211102551 **2ndF** **→rθ** **θ:** 33.69006753

$\begin{pmatrix} r=14 \\ \theta=36 \end{pmatrix} \rightarrow \begin{pmatrix} x=11.322623792 \\ y=8.228993532 \end{pmatrix}$ **r** 14 **(x,y)** 36 **X:** 11.322623792 **2ndF** **→xy** **Y:** 8.228993532

16 **CNST** **CONV**

$V_0 = 15.3 \text{ m/s}$ **ON/C** 15.3 **×** 10 **+**
 $t = 10 \text{ s}$ **2** **2ndF** **×** **X⁻¹** **×** **CNST** 03
 $V_0 t + \frac{1}{2}gt^2 = ? \text{ m}$ **×** 10 **×** **X²** **=** **CHANGE** 643.3325

125 yd = ? m **ON/C** 125 **2ndF** **CONV** 05 **=** **CHANGE** **CHANGE** 114.3

- Physical constants and metric conversions are shown in the tables.
 - Les constantes physiques et les conversions des unités sont indiquées sur les tableaux.
 - Physikalische Konstanten und metrische Umrechnungen sind in der Tabelle aufgelistet.
 - Las constantes físicas y conversiones métricas son mostradas en las tables.
 - Constantes físicas e conversões métricas estão mostradas nas tabelas.
 - La constanti fiche e le conversioni delle unità di misura vengono mostrate nella tabella.
 - De natuurconstanten en metrische omrekeningen staan in de tabellen hiernaast.
 - A fizikai konstansok és a metrikus átváltások a táblázatokban található.
 - Fyzikální konstanty a převody do metrické soustavy jsou uvedeny v tabulce.
 - Fysikaliska konstanter och metriska omvandlingar visas i tabellerna.
 - Fysikaaliset vakiot ja metrimuunnokset näkyvät taulukoista.
 - Fysiske konstanter og metriske omskrivninger vises i tabellen.
 - ค่าคงที่ทางฟิสิกส์และการแปลงหน่วยเมตริกแสดงไว้ในตาราง
 - الثوابت الفيزيائية والجدول المترية مبيّنة في الجداول
 - Konstanta fizika dan konversi metrik diperlihatkan di dalam tabel.
 - 사용 가능한 물리 상수 및 단위 환산 방법은 다음 표와 같습니다.
- CNST** 01–52

01: c, c_0 (m s ⁻¹)	19: μ_B (J T ⁻¹)	37: eV (J)
02: G (m ³ kg ⁻¹ s ⁻²)	20: μ_e (J T ⁻¹)	38: t (K)
03: g_n (m s ⁻²)	21: μ_N (J T ⁻¹)	39: AU (m)
04: m_e (kg)	22: μ_p (J T ⁻¹)	40: pc (m)
05: m_p (kg)	23: μ_n (J T ⁻¹)	41: $M(^{12}C)$ (kg mol ⁻¹)
06: m_n (kg)	24: μ_H (J T ⁻¹)	42: \hbar (J s)
07: m_μ (kg)	25: λ_c (m)	43: E_h (J)
08: $1u$ (kg)	26: $\lambda_{c,p}$ (m)	44: G_0 (s)
09: e (C)	27: σ (W m ⁻² K ⁻⁴)	45: α^{-1}
10: h (J s)	28: N_A, L (mol ⁻¹)	46: m_p/m_e
11: k (J K ⁻¹)	29: V_m (m ³ mol ⁻¹)	47: M_u (kg mol ⁻¹)
12: μ_0 (NA ⁻²)	30: R (J mol ⁻¹ K ⁻¹)	48: $\lambda_{c,n}$ (m)
13: ϵ_0 (F m ⁻¹)	31: F (C mol ⁻¹)	49: c_1 (W m ²)
14: r_e (m)	32: R_K (Ω)	50: c_2 (m K)
15: α	33: $-e/m_e$ (C kg ⁻¹)	51: Z_0 (Ω)
16: a_0 (m)	34: $h/2m_e$ (m ² s ⁻¹)	52: atm (Pa)
17: R_∞ (m ⁻¹)	35: γ_p (s ⁻¹ T ⁻¹)	
18: Φ_0 (Wb)	36: K_J (Hz V ⁻¹)	

x **2ndF** **CONV** 01–44

01: in→cm	16: kg→lb	31: calIT→J
02: cm→in	17: °F→°C	32: J→calIT
03: ft→m	18: °C→°F	33: hp→W
04: m→ft	19: gal (US)→L	34: W→hp
05: yd→m	20: L→gal (US)	35: ps→W
06: m→yd	21: gal (UK)→L	36: W→ps
07: mi→km	22: L→gal (UK)	37: kgf/cm ² →Pa
08: km→mi	23: fl oz(US)→mL	38: Pa→kgf/cm ²
09: n mi→m	24: mL→fl oz(US)	39: atm→Pa
10: m→n mi	25: fl oz(UK)→mL	40: Pa→atm
11: acre→m ²	26: mL→fl oz(UK)	41: mmHg→Pa
12: m ² →acre	27: calIT→J	42: Pa→mmHg
13: oz→g	28: J→calIT	43: kgf·m→N·m
14: g→oz	29: calIT5→J	44: N·m→kgf·m
15: lb→kg	30: J→calIT5	

17 **MATH** **(ENG)**

100 m × 10 k = ? **100** **MATH** **3** **4** **×** **10** **MATH** **3** **0** **=** 1'000.

18 **MDF** **SETUP**

→ [FIX, TAB = 1] **ON/C** **2ndF** **SETUP** **1** **0** **1** 0.0

5 ÷ 9 = ANS **5** **÷** **9** **=** $\frac{5}{9}$
CHANGE 0.6

ANS × 9 = **×** **9** **=** *1 5.0
5 **÷** **9** **=** $\frac{5}{9}$
CHANGE 0.6

→ [MDF] **2ndF** **MDF** $\frac{3}{5}$

ANS × 9 = **×** **9** **=** *2 $5\frac{2}{5}$
CHANGE **CHANGE** 5.4

→ [NORM1] **2ndF** **SETUP** **1** **3** 5.4

*1 $\frac{5}{9} \times 9 = 5.555555555555555 \times 10^{-1} \times 9$
 *2 $\frac{3}{5} \times 9 = 0.6 \times 9$

19 **MATH** **(ALGB)**

$f(x) = x^3 - 3x^2 + 2$ **ON/C** **ALPHA** **X** **2ndF** **X³** **–** **3** **ALPHA** **X** **X²** **+** **2**

$x = -1$ **MATH** **1** **(–)** **1** **ENTER** -2.

$x = -0.5$ **MATH** **1** **(–)** **0.5** **ENTER** $1\frac{1}{8}$

$\sqrt{A^2 + B^2}$ **2ndF** **√** **ALPHA** **A** **X²** **+** **ALPHA** **B** **X²**

A = 2, B = 3 **MATH** **1** **2** **ENTER** **3** **ENTER** $\sqrt{13}$

A = 2, B = 5 **MATH** **1** **5** **ENTER** $\sqrt{29}$

20 **MATH** **(SOLVER)**

sin x – 0.5 **ON/C** **sin** **ALPHA** **X** **–** **0.5**

Start = 0 **MATH** **2** **0** **ENTER** **ENTER** 30.

Start = 180 **ENTER** **180** **ENTER** **ENTER** 150.

21 **DATA** **(x,y)** **Σx** **Σy** **Σxy** **n** **Σx²** **Σy²** **Σxy** **σ_x** **σ_y** **σ_{xy}** **r** **a** **b** **c** **x'** **y'**

MODE **1** **0** **Stat** **0** [SD] **0.**

2ndF **CA**

DATA

95 **95** **DATA** **DATA SET=** 1.

80 **80** **DATA** **DATA SET=** 2.

80 **DATA** **DATA SET=** 3.

75 **75** **(x,y)** **3** **DATA** **DATA SET=** 4.

75 **50** **DATA** **DATA SET=** 5.

\bar{x} **RCL** **Σx** $\bar{x} = 75.71428571$

σ_x **RCL** **σx** $\sigma_x = 12.37179148$

n **RCL** **n** $n = 7.$

Σx **RCL** **Σx** $\Sigma x = 530.$

Σx^2 **RCL** **Σx²** $\Sigma x^2 = 41'200.$

s_x **RCL** **sx** $s_x = 13.3630621$

s_x^2 **X²** **=** $s_x^2 = 178.5714286$

(95 – \bar{x}) **×** **10** **+** **50** **Σx** **×** **10** **+** **50** **=** 64.43210706

Stat 1 [L1NE]

DATA	MODE	1	1	
x	2ndF	(x,y)	CA	
2	2	(x,y)	5	DATA DATA SET= 1.
2				DATA DATA SET= 2.
12	12	(x,y)	24	DATA DATA SET= 3.
21	21	(x,y)	40	DATA DATA SET= 4.
21			40	DATA DATA SET= 4.
21			40	DATA DATA SET= 4.
15	15	(x,y)	25	DATA DATA SET= 5.

$a =$ $a = 1.050261097$
 $b =$ $b = 1.826044386$
 $r =$ $r = 0.995176343$
 $sx =$ $sx = 8.541216597$
 $sy =$ $sy = 15.67223812$

$x = 3 \rightarrow y' = ?$ $y' = 6.528394256$
 $y = 46 \rightarrow x' = ?$ $x' = 24.61590706$

Stat 2 [QUAD]

DATA	MODE	1	2	
x	2ndF	(x,y)	CA	
12	12	(x,y)	41	DATA DATA SET= 1.
8	8	(x,y)	13	DATA DATA SET= 2.
5	5	(x,y)	2	DATA DATA SET= 3.
23	23	(x,y)	200	DATA DATA SET= 4.
15	15	(x,y)	71	DATA DATA SET= 5.

$a =$ $a = 5.357506761$
 $b =$ $b = -3.120289663$
 $c =$ $c = 0.503334057$

$x = 10 \rightarrow y' = ?$ $y' = 24.4880159$
 $y = 22 \rightarrow x' = ?$ $x' = 9.63201409$
 $1: -3.432772026$
 $2:$

Stat 0 [SD]

DATA	MODE	1	0	
x	2ndF	(x,y)	CA	
20	20			DATA DATA SET= 1.
30	30			DATA DATA SET= 2.
40	40	(x,y)	2	DATA DATA SET= 3.
40				
50	50			DATA DATA SET= 4.

↓

DATA	MODE	2ndF	CD	
30				DATA DATA SET= 3.
45			45	DATA X: 45.
45		3		DATA F: 3.
45				
60		60		DATA X: 60.

23

$$\bar{x} = \frac{\sum x}{n}$$

$$sx = \sqrt{\frac{\sum x^2 - n\bar{x}^2}{n-1}}$$

$$\bar{y} = \frac{\sum y}{n}$$

$$sy = \sqrt{\frac{\sum y^2 - n\bar{y}^2}{n-1}}$$

$$\sigma_x = \sqrt{\frac{\sum x^2 - n\bar{x}^2}{n}}$$

$$\sigma_y = \sqrt{\frac{\sum y^2 - n\bar{y}^2}{n}}$$

$$\sum xy = x_1y_1 + x_2y_2 + \dots + x_ny_n$$


$$\sum x = x_1 + x_2 + \dots + x_n$$


$$\sum x^2 = x_1^2 + x_2^2 + \dots + x_n^2$$


$$\sum y = y_1 + y_2 + \dots + y_n$$

$$\sum y^2 = y_1^2 + y_2^2 + \dots + y_n^2$$

24 (MATH) (-t, P, Q, R)

$P(t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^t e^{-\frac{x^2}{2}} dx$ ($t \geq 0$)


$Q(t) = \frac{1}{\sqrt{2\pi}} \int_0^t e^{-\frac{x^2}{2}} dx$ ($t \geq 0$)


$R(t) = \frac{1}{\sqrt{2\pi}} \int_t^{\infty} e^{-\frac{x^2}{2}} dx$ ($t \geq 0$)


Stat 0 [SD]


DATA	MODE	1	0	
x	2ndF	(x,y)	CA	
20	20	(x,y)	1	DATA DATA SET= 1.
30	30	(x,y)	3	DATA DATA SET= 2.
40	40	(x,y)	5	DATA DATA SET= 3.
50	50	(x,y)	8	DATA DATA SET= 4.
60	60	(x,y)	13	DATA DATA SET= 5.
70	70	(x,y)	10	DATA DATA SET= 6.
80	80	(x,y)	7	DATA DATA SET= 7.
90	90	(x,y)	3	DATA DATA SET= 8.

$\bar{x} =$ $\bar{x} = 60.4$
 $\sigma_x =$ $\sigma_x = 16.48757108$

$x = 35 \rightarrow P(t)?$ $= 0.061713$
 $x = 75 \rightarrow Q(t)?$ $= 0.312061$
 $x = 85 \rightarrow R(t)?$ $= 0.067845$
 $t = 1.5 \rightarrow R(t)?$ $= 0.066807$

25 (MODE) (CPLX)

$(12 - 6i) + (7 + 15i) - (11 + 4i) = 8 + 5.1i$
 $6 \times (7 - 9i) \times (-5 + 8i) = 222 + 606.1i$
 $16 \times (\sin 30^\circ + i \cos 30^\circ) \div (\sin 60^\circ + i \cos 60^\circ) = 13.85640646 + 8.1i$



$r_1 = 8, \theta_1 = 70^\circ$
 $r_2 = 12, \theta_2 = 25^\circ$
 $\rightarrow r = ?, \theta = ?^\circ$

$1 + i$
 $\rightarrow r = ?, \theta = ?^\circ$

$(2 - 3i)^2 = -5 - 12.1i$
 $\frac{1}{1+i} = 0.5 - 0.5i$
 $\text{CONJ}(5 + 2i) = 5 - 2.1i$

25 MODE (MATRIX)

matA = $\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$

matB = $\begin{bmatrix} 3 & 1 \\ 2 & 6 \end{bmatrix}$

matA × matB = $\begin{bmatrix} 7 & 13 \\ 17 & 27 \end{bmatrix}$

matA⁻¹ = $\begin{bmatrix} -2 & 1 \\ 1.5 & -0.5 \end{bmatrix}$

dim (matA, 3, 3) = $\begin{bmatrix} 1 & 2 & 0 \\ 3 & 4 & 0 \\ 0 & 0 & 0 \end{bmatrix}$

fill (5, 3, 3) = $\begin{bmatrix} 5 & 5 & 5 \\ 5 & 5 & 5 \\ 5 & 5 & 5 \end{bmatrix}$

cumul matA = $\begin{bmatrix} 1 & 2 \\ 4 & 6 \end{bmatrix}$

aug (matA, matB) = $\begin{bmatrix} 1 & 2 & 3 & 1 \\ 3 & 4 & 2 & 6 \end{bmatrix}$

identity 3 = $\begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$

rnd_mat (2, 3) = $\begin{bmatrix} 5 & 5 & 2 \\ 5 & 5 & 3 \end{bmatrix}$

det matA = -2.

trans matB = $\begin{bmatrix} 3 & 2 \\ 1 & 6 \end{bmatrix}$

mat → list = $\begin{bmatrix} 1: 1 & 2: 3 \\ 1: 3 & 2: 2 \end{bmatrix}$

27 MODE (LIST)

{2, 7, 4} → L1

{-3, -1, -4} → L2

L1 + L2 = $\begin{bmatrix} 1: -1 & 2: 6 \\ 3: 0 \end{bmatrix}$

sortA L1 = $\begin{bmatrix} 1: 2 & 2: 4 \\ 3: 7 \end{bmatrix}$

sortD L1 = $\begin{bmatrix} 1: 7 & 2: 4 \\ 3: 2 \end{bmatrix}$

dim (L1, 5) = $\begin{bmatrix} 1: 2 & 2: 7 \\ 3: 4 & 4: 0 \\ 5: 0 \end{bmatrix}$

fill (5, 5) = $\begin{bmatrix} 1: 5 & 2: 5 \\ 3: 5 & 4: 5 \\ 5: 5 \end{bmatrix}$

cumul L1 = $\begin{bmatrix} 1: 2 & 2: 9 \\ 3: 13 \end{bmatrix}$

df_list L1 = $\begin{bmatrix} 1: 5 & 2: -3 \end{bmatrix}$

aug (L1, L2) = $\begin{bmatrix} 1: 2 & 2: 7 \\ 3: 4 & 4: -3 \\ 5: -1 & 6: -4 \end{bmatrix}$

min L1 = 2.

max L1 = 7.

mean L1 = 4.333333333

med L1 = 4.

sum L1 = 13.

prod L1 = 56.

stdDv L1 = 2.516611478

vari L1 = 6.333333333

o_prod (L1, L2) = $\begin{bmatrix} 1: -24 & 2: -4 \\ 3: 19 \end{bmatrix}$

i_prod (L1, L2) = -29.

abs_list L2 = 5.099019514

list → matA = $\begin{bmatrix} 2 & -3 \\ 7 & -1 \\ 4 & -4 \end{bmatrix}$

28 MODE (2-VLE, 3-VLE, QUAD, CUBIC)

$2x + 3y = 4$
 $5x + 6y = 7$

x = ? X: -1.
 y = ? Y: 2.
 det(D) = ? D: -3.

$x + y - z = 9$
 $6x + 6y - z = 17$
 $14x - 7y + 2z = 42$

x = ? X: 3.238095238
 y = ? Y: -1.638095238
 z = ? Z: -7.4
 det(D) = ? D: 105.

$3x^2 + 4x - 95 = 0$

x = ? X = 1: 5.
 2: -6.333333333

$5x^3 + 4x^2 + 3x + 7 = 0$

x = ? X = 1: -1.233600307
 2: 0.216800153
 ±1.043018296i

29

Function keys	Display	Buffer space*
Touches de fonction	Affichage	Espace tampon*
Funktionstasten	Anzeige	Speicherplatz*
Teclas de función	Visualizador	Espacio de memoria intermedia*
Teclas de função	Exibição	Espaço na memória intermediária*
Tasti di funzione	Display	Memoria tamponne*
Functietoetsen	Display	Bufferruimte*
Függvénybillentyűk	Kijelző	Pufferterület*
Tlačítka funkcií	Zobrazení	Vyrovňovací paměť*
Funktionstangenten	Visning	Buffertutrymme*
Funktionäppäimet	Näyttö	Puskuritila*
Funktionstaster	Display	Bufferplads*
ปุ่มฟังก์ชัน	การแสดงผล	จำนวนบัฟเฟอร์*
مفاتيح الوظائف	الشاشة	حيز تخزين مؤقت*
Tombol fungsi	Tampilan	Ruang buffer*
함수 키	화면 표시	버퍼 공간*

2ndF X^{-1}	\square^{-1}	1
X^2	\square^2	1
2ndF X^3	\square^3	1
y^x	\square^{\square}	5
2ndF $\log_{\square} X$	$\log_{\square}(\square)$	7
2ndF e^x	e^{\square}	5
2ndF 10^x	10^{\square}	5
2ndF $\sqrt{\square}$	$\sqrt{\square}$	5
2ndF $\sqrt[3]{\square}$	$\sqrt[3]{\square}$	5
2ndF $\sqrt[n]{\square}$	$\square\sqrt{\square}$	7
a/b / 2ndF ab/c	$\frac{\square}{\square}$	7
2ndF abs	$ \square $	5
$\int dx$	$\int_{\square}^{\square} \square dx$	9
2ndF d/dx	$\frac{d(\square)}{dx} \Big _{x=\square}$	7
2ndF Σ	$\sum_{x=\square}^{\square} (\square)$	9
()	()	4

* The amount of memory used for the display in the WriteView editor, measured in characters (excluding entered values, denoted in the chart by “□”).

* Espace mémoire utilisé pour préserver l’affichage dans l’éditeur WriteView, mesuré en caractère (à l’exception des valeurs d’entrée, indiquées dans le tableau par “□”).

* Der für die Anzeige im WriteView Editor verwendete Speicherplatz, gemessen in Zeichen (ohne die eingegebenen Werte, die in der Tabelle mit “□” markiert sind).

* La cantidad de memoria usada para visualizar en el editor WriteView, medida en caracteres (excluyendo los valores introducidos, indicados en el grafico mediante “□”).

* A quantidade de memória que é usada para a exibição no editor WriteView, medida em caracteres (excluíndo os valores introduzidos, indicados no quadro por “□”).

* La quantità di memoria utilizzata per la visualizzazione nell’editor WriteView, misurata in caratteri (escludendo i valori inseriti, indicati nella tabella con il simbolo “□”).

* De hoeveelheid geheugen dat wordt gebruikt om de WriteView editor weer te geven, gemeten in symbolen (met uitzondering van ingevoerde waarden aangeduid in de grafiek met “□”).

* A WriteView szerkesztő megjelenítési műveleteire használatos memóriaterület, karakterben kifejezve (az ábrán “□” karakterrel jelölt beviteli értékeket nem számítva).

* Množství paměti využívané pro účely zobrazení v editoru WriteView, vyjádřené počtem znaků (vyjma zadaných hodnot, označených v grafu znakem “□”).

* Den mängd minne som används för visning med WriteView-redigeraren, mätt i antalet tecken (exklusive inmatade värden, vilka anges som “□” i tabellen).

* Näytön WriteView-editorissa käytämä muisti merkkeinä laskettuna (pois lukien syötetyt arvot, taulukossa merkitty “□”).

* Den mængde hukommelse, der bruges til visning i WriteView-editoren, målt i tegn (med undtagelse af indtastede værdier, der angives med “□” i tabellen).

* จำนวนหน่วยความจำ, หน่วยเป็นตัวอักษร, ที่ถูกใช้สำหรับการแสดงผลใน WriteView (ไม่นับค่าที่ป้อนซึ่งแสดงโดย “□” ในตาราง)

* كمية الذاكرة المستعملة لغرض العرض في برنامج محرر WriteView. مقاسة بالاحرف والرموز (باستثناء القيم التي تم ادخالها، المشار إليها في الجدول بالعلامة “□”).

* Jumlah memori yang digunakan untuk kepentingan tampilan dalam editor WriteView, diukur dalam jumlah karakter (tidak termasuk nilai yang dimasukkan, ditunjukkan dalam diagram dengan “□”).

* WriteView 편집기의 화면 표시에 사용되는 메모리 양 (문자 수 기준, 도표에서 “□”로 표시된 사용자 입력 값은 제외).

Function Fonction Funktion Función Função Funzioni Functie Függvény Funkce Funktion Funktio Funktion ฟังก์ชัน الدالة Fungsi 함수	Dynamic range Plage dynamique zulässiger Bereich Rango dinámico Gama dinâmica Campi dinamici Rekencapaciteit Megengedett számítási tartomány Dynamický rozsah Definitionsområde Dynaaminen ala Dynamikområde พื้นที่ในการคำนวณ النطاق الديناميكي Kisaran dinamis 동적 범위
$\sin x, \cos x, \tan x$	DEG: $ x < 10^{10}$ ($\tan x: x \neq 90(2n - 1)^*$) RAD: $ x < \frac{\pi}{180} \times 10^{10}$ ($\tan x: x \neq \frac{\pi}{2}(2n - 1)^*$) GRAD: $ x < \frac{10}{9} \times 10^{10}$ ($\tan x: x \neq 100(2n - 1)^*$)
$\sin^{-1}x, \cos^{-1}x$	$ x \leq 1$
$\tan^{-1}x, \sqrt[3]{x}$	$ x < 10^{100}$
$\ln x, \log x, \log_a x$	$10^{-99} \leq x < 10^{100}, 10^{-99} \leq a < 10^{100} (a \neq 1)$
y^x	<ul style="list-style-type: none"> $y > 0: -10^{100} < x \log y < 100$ $y = 0: 0 < x < 10^{100}$ $y < 0: x = n$ ($0 < x < 1: \frac{1}{x} = 2n - 1, x \neq 0$)*, $-10^{100} < x \log y < 100$
$x\sqrt{y}$	<ul style="list-style-type: none"> $y > 0: -10^{100} < \frac{1}{x} \log y < 100 (x \neq 0)$ $y = 0: 0 < x < 10^{100}$ $y < 0: x = 2n - 1$ ($0 < x < 1: \frac{1}{x} = n, x \neq 0$)*, $-10^{100} < \frac{1}{x} \log y < 100$
e^x	$-10^{100} < x \leq 230.2585092$
10^x	$-10^{100} < x < 100$
$\sinh x, \cosh x, \tanh x$	$ x \leq 230.2585092$
$\sinh^{-1}x$	$ x < 10^{50}$
$\cosh^{-1}x$	$1 \leq x < 10^{50}$
$\tanh^{-1}x$	$ x < 1$
x^2	$ x < 10^{50}$
x^3	$ x < 2.15443469 \times 10^{33}$
\sqrt{x}	$0 \leq x < 10^{100}$
x^{-1}	$ x < 10^{100} (x \neq 0)$
$n!$	$0 \leq n \leq 69^*$
nPr	$0 \leq r \leq n \leq 9999999999^*$ $\frac{n!}{(n-r)!} < 10^{100}$
nCr	$0 \leq r \leq n \leq 9999999999^*$ $0 \leq r \leq 69$ $\frac{n!}{(n-r)!} < 10^{100}$
\leftrightarrow DEG, D°M'S	$0^\circ 0' 0.00001'' \leq x < 10000^\circ$
$x, y \rightarrow r, \theta$	$\sqrt{x^2 + y^2} < 10^{100}$
$r, \theta \rightarrow x, y$	$0 \leq r < 10^{100}$ DEG: $ \theta < 10^{10}$ RAD: $ \theta < \frac{\pi}{180} \times 10^{10}$ GRAD: $ \theta < \frac{10}{9} \times 10^{10}$
DRG ▶	DEG \rightarrow RAD, GRAD \rightarrow DEG: $ x < 10^{100}$ RAD \rightarrow GRAD: $ x < \frac{\pi}{2} \times 10^{98}$
$(A + Bi) + (C + Di)$	$ A + C < 10^{100}, B + D < 10^{100}$
$(A + Bi) - (C + Di)$	$ A - C < 10^{100}, B - D < 10^{100}$
$(A + Bi) \times (C + Di)$	$(AC - BD) < 10^{100}$ $(AD + BC) < 10^{100}$

$(A + Bi) \div (C + Di)$	$\frac{AC + BD}{C^2 + D^2} < 10^{100}$ $\frac{BC - AD}{C^2 + D^2} < 10^{100}$ $C^2 + D^2 \neq 0$
→ DEC → BIN → PEN → OCT → HEX AND OR XOR XNOR	DEC: $ x \leq 9999999999$ BIN: $1000000000 \leq x \leq 1111111111$ $0 \leq x \leq 1111111111$ PEN: $2222222223 \leq x \leq 4444444444$ $0 \leq x \leq 2222222222$ OCT: $4000000000 \leq x \leq 7777777777$ $0 \leq x \leq 3777777777$ HEX: $FDABF41C01 \leq x \leq FFFFFFFF$ $0 \leq x \leq 2540BE3FF$
NOT	BIN: $1000000000 \leq x \leq 1111111111$ $0 \leq x \leq 1111111111$ PEN: $2222222223 \leq x \leq 4444444444$ $0 \leq x \leq 2222222221$ OCT: $4000000000 \leq x \leq 7777777777$ $0 \leq x \leq 3777777777$ HEX: $FDABF41C01 \leq x \leq FFFFFFFF$ $0 \leq x \leq 2540BE3FE$
NEG	BIN: $1000000001 \leq x \leq 1111111111$ $0 \leq x \leq 1111111111$ PEN: $2222222223 \leq x \leq 4444444444$ $0 \leq x \leq 2222222222$ OCT: $4000000001 \leq x \leq 7777777777$ $0 \leq x \leq 3777777777$ HEX: $FDABF41C01 \leq x \leq FFFFFFFF$ $0 \leq x \leq 2540BE3FF$

* n, r: integer / entier / ganze Zahlen / entero / inteiro / intero / geheel getal / egész számok / celé číslo / helta / kokonaisluku / helta / จำนวนเต็ม / عدد صحيح / bilangan bulat / 정수

Nur für Deutschland/For Germany only:

Umweltschutz

Das Gerät wird durch eine Batterie mit Strom versorgt. Um die Batterie sicher und umweltschonend zu entsorgen, beachten Sie bitte folgende Punkte:

- Bringen Sie die leere Batterie zu Ihrer örtlichen Mülldeponie, zum Händler oder zum Kundenservice-Zentrum zur Wiederverwertung.
- Werfen Sie die leere Batterie niemals ins Feuer, ins Wasser oder in den Hausmüll.

Seulement pour la France/For France only:

Protection de l'environnement

L'appareil est alimenté par pile. Afin de protéger l'environnement, nous vous recommandons:

- d'apporter la pile usagée ou à votre revendeur ou au service après-vente, pour recyclage.
- de ne pas jeter la pile usagée dans une source de chaleur, dans l'eau ou dans un vide-ordures.

Endast svensk version/For Sweden only:

Miljöskydd

Denna produkt drivs av batteri.

Vid batteribyte skall följande iakttas:

- Det förbrukade batteriet skall inlämnas till batteriansamling eller till kommunal miljöstation för återinsamling.
- Kasta ej batteriet i vattnet eller i hushållsoporna. Batteriet får ej heller utsättas för öppen eld.

For Europe only:

SHARP

SHARP ELECTRONICS (Europe) GmbH

Sonninstraße 3, D-20097 Hamburg

SHARP CORPORATION

OPMERKING: ALLEEN VOOR NEDERLAND/
NOTE: FOR NETHERLANDS ONLY

(NL) Batterij niet weggooiden, maar inleveren als KCA.



For Australia/New Zealand only:
For warranty information please see www.sharp.net.au.

Attention: Your product is marked with this symbol. It means that used electrical and electronic products should not be mixed with general household waste. There is a separate collection system for these products.



Attention: Your product is marked with this symbol. It means that used electrical and electronic products should not be mixed with general household waste. There is a separate collection system for these products.

A. Information on Disposal of Users (private households)

1. In the European Union

Attention: If you want to dispose of this equipment, please do not use the ordinary dust bin!

Used electrical and electronic equipment must be treated separately and in accordance with legislation that requires proper treatment, recovery and recycling of used electrical and electronic equipment.

Following the implementation by member states, private households within the EU states may return their used electrical and electronic equipment to designated collection facilities free of charge*. In some countries* your local retailer may also take back your old product free of charge if you purchase a similar new one.* Please contact your local authority for further details.

If you used electrical or electronic equipment has batteries or accumulators, please dispose of these separately beforehand according to local requirements.

By disposing of this product correctly you will help ensure that the waste undergoes the necessary treatment, recovery and recycling and thus prevent potential negative effects on the environment and human health which could otherwise arise due to inappropriate waste handling.

2. In other Countries outside the EU

If you wish to discard this product, please contact your local authorities and ask for the correct method of disposal.

For Switzerland: Used electrical or electronic equipment can be returned free of charge to the dealer, even if you don't purchase a new product. Further collection facilities are listed on the homepage of www.swico.ch or www.sens.ch.

B. Information on Disposal for Business Users.

1. In the European Union

If the product is used for business purposes and you want to discard it:

Please contact your SHARP dealer who will inform you about the take-back of the product. You might be charged for the costs arising from take-back and recycling. Small products (and small amounts) might be taken back by your local collection facilities.

For Spain: Please contact the established collection system or your local authority for take-back of your used products.

2. In other Countries outside the EU

If you wish to discard of this product, please contact your local authorities and ask for the correct method of disposal.

ENGLISH



Attention : votre produit comporte ce symbole. Il signifie que les produits électriques et électroniques usagés ne doivent pas être mélangés avec les déchets ménagers généraux. Un système de collecte séparé est prévu pour ces produits.

A. Informazioni sulla mise au rebut à l'intention des utilisateurs privés (ménages)

1. Au sein de l'Union européenne

Attention : si vous souhaitez mettre cet appareil au rebut, ne le jetez pas dans une poubelle ordinaire !

Les appareils électriques et électroniques usagés doivent être traités séparément et conformément aux lois en vigueur en matière de traitement, de récupération et de recyclage adéquats de ces appareils. Suite à la mise en oeuvre de ces dispositions dans les Etats membres, les ménages résidant au sein de l'Union européenne peuvent désormais ramener gratuitement* leurs appareils électriques et électroniques usagés sur des sites de collecte désignés. Dans certains pays*, votre détaillant reprendra également gratuitement votre ancien produit si vous achetez un produit neuf similaire.* Veuillez contacter votre administration locale pour plus de renseignements.

Si votre appareil électrique ou électronique usagé comporte des piles ou des accumulateurs, veuillez les mettre séparément et préalablement au rebut conformément à la législation locale en vigueur.

En veillant à la mise au rebut correcte de ce produit, vous contribuerez à assurer le traitement, la récupération et le recyclage nécessaires de ces déchets, et préviendrez ainsi les effets néfastes potentiels de leur mauvaise gestion sur l'environnement et la santé humaine.

2. Pays hors de l'Union européenne

Si vous souhaitez mettre ce produit au rebut, veuillez contacter votre administration locale qui vous renseignera sur la méthode d'élimination correcte de cet appareil.

Suisse : les équipements électriques ou électroniques usagés peuvent être ramenés gratuitement au détaillant, même si vous n'achetez pas un nouvel appareil. Pour obtenir la liste des autres sites de collecte, veuillez vous reporter à la page d'accueil du site www.swico.ch ou www.sens.ch.

B. Informations sur la mise au rebut à l'intention des entreprises

1. Au sein de l'Union européenne

Si ce produit est utilisé dans le cadre des activités de votre entreprise et que vous souhaitez le mettre au rebut :

Veuillez contacter votre revendeur SHARP qui vous informera des conditions de reprise du produit. Les frais de reprise et de recyclage pourront vous être facturés. Les produits de petite taille (et en petites quantités) pourront être repris par vos organisations de collecte locales.

Espagne : veuillez contacter l'organisation de collecte existante ou votre administration locale pour les modalités de reprise de vos produits usagés.

2. Pays hors de l'Union européenne

Si vous souhaitez mettre ce produit au rebut, veuillez contacter votre administration locale qui vous renseignera sur la méthode d'élimination correcte de cet appareil.

FRANÇAIS



Achtung: Ihr Produkt trägt dieses Symbol. Es besagt, dass Elektro- und Elektronikgeräte nicht mit dem Haushaltsmüll entsorgt, sondern einem getrennten Rücknahme-system zugeführt werden sollten.

A. Entsorgungsinformationen für Benutzer aus Privathaushalten

1. In der Europäischen Union

Achtung: Werfen Sie dieses Gerät zur Entsorgung bitte nicht in den normalen Hausmüll!

Gemäß einer neuen EU-Richtlinie, die die ordnungsgemäße Rücknahme, Behandlung und Verwertung von gebrauchten Elektro- und Elektronikgeräten vorschreibt, müssen elektrische und elektronische Altgeräte getrennt entsorgt werden.

Nach der Einführung der Richtlinie in den EU-Mitgliedstaaten können Privathaushalte ihre gebrauchten Elektro- und Elektronikgeräte nun kostenlos an ausgewiesenen Rücknahmestellen abgeben*. In einigen Ländern* können Sie Altgeräte in U. auch kostenlos bei Ihrem Fachhändler abgeben, wenn Sie ein vergleichbares neues Gerät kaufen.*

*) Weitere Einzelheiten erhalten Sie von Ihrer Gemeindeverwaltung. Wenn Ihre gebrauchten Elektro- und Elektronikgeräte Batterien oder Akkus enthalten, sollten diese vorher entnommen und gemäß örtlich geltenden Regelungen getrennt entsorgt werden.

Durch die ordnungsgemäße Entsorgung tragen Sie dazu bei, dass Altgeräte angemessen gesammelt, behandelt und verwendet werden. Dies verhindert mögliche schädliche Auswirkungen auf Umwelt und Gesundheit durch eine unsachgemäße Entsorgung.

2. In anderen Ländern außerhalb der EU

Bitte erkundigen Sie sich bei Ihrer Gemeindeverwaltung nach dem ordnungsgemäßen Verfahren zur Entsorgung dieses Geräts.

Für die Schweiz: Gebrauchte Elektro- und Elektronikgeräte können kostenlos beim Händler abgegeben werden, auch wenn Sie kein neues Produkt kaufen. Weitere Rücknahmesysteme finden Sie auf der Homepage von www.swico.ch oder www.sens.ch.

B. Entsorgungsinformationen für gewerbliche Nutzer

1. In der Europäischen Union

Wenn Sie dieses Produkt für gewerbliche Zwecke genutzt haben und nun entsorgen möchten:

Bitte wenden Sie sich an Ihren SHARP Fachhändler, der Sie über die Rücknahme des Produkts informieren kann. Möglicherweise müssen Sie die Kosten für die Rücknahme und Verwertung tragen. Kleine Produkte (und kleine Mengen) können möglicherweise bei Ihrer örtlichen Rücknahmestelle abgegeben werden.

Für Spanien: Bitte wenden Sie sich an das vorhandene Rücknahmesystem oder Ihre Gemeindeverwaltung, wenn Sie Fragen zur Rücknahme Ihrer Altgeräte haben.

2. In anderen Ländern außerhalb der EU

Bitte erkundigen Sie sich bei Ihrer Gemeindeverwaltung nach dem ordnungsgemäßen Verfahren zur Entsorgung dieses Geräts.

DEUTSCH

A. Información sobre eliminación para usuarios particulares

1. En la Unión Europea

Atención: Si quiere deshechar este equipo, ¡por favor no utilice el cubo de la basura habitual!

Los equipos eléctricos y electrónicos usados deberían tratarse por separado de acuerdo con la legislación que requiere un tratamiento, una recuperación y un reciclaje adecuados de los equipos eléctricos y electrónicos usados.

Tras la puesta en práctica por parte de los estados miembros, los hogares de particulares dentro de los estados de la Unión Europea pueden devolver sus equipos eléctricos y electrónicos a los centros de recogida designados sin coste alguno*. En algunos países* es posible que también su vendedor local se lleve su viejo producto sin coste alguno si Ud. compra un nuevo similar.*

*) Por favor, póngase en contacto con su autoridad local para obtener más detalles.

Si sus equipos eléctricos o electrónicos usados tienen pilas o acumuladores, por favor deséchelos por separado con antelación según los requisitos locales.

Al deshechar este producto correctamente, ayudará a asegurar que los residuos reciban el tratamiento, la recuperación y el reciclaje necesarios, previniendo de esta forma posibles efectos negativos en el medio ambiente y la salud humana que de otra forma podrían producirse debido a una manipulación de residuos inapropiada.

2. En otros países fuera de la Unión Europea

Si desea deshechar este producto, por favor póngase en contacto con las autoridades locales y pregunte por el método de eliminación correcto.

Para Suíza: Los equipos eléctricos o electrónicos pueden devolverse al vendedor sin coste alguno, incluso si no compra ningún nuevo producto. Se puede encontrar una lista de otros centros de recogida en la página principal de www.swico.ch o www.sens.ch.

B. Información sobre Eliminación para empresas usuarias

1. En la Unión Europea

Si el producto se utiliza en una empresa y quiere deshecharlo: Por favor póngase en contacto con su distribuidor SHARP quien le informará sobre la recogida del producto. Puede ser que le cobren los costes de recogida y reciclaje. Puede ser que los productos de tamaño pequeño (y las cantidades pequeñas) sean recogidos por sus centros de recogida locales.

Para España: por favor, póngase en contacto con el sistema de recogida establecido o con las autoridades locales para la recogida de los productos usados.

2. En otros países fuera de la Unión Europea

Si desea deshechar este producto, por favor póngase en contacto con sus autoridades locales y pregunte por el método de eliminación correcto.

ESPAÑOL

A. Informazioni sullo smaltimento per gli utenti (privati)

1. Nell'Unione europea

Attenzione: Per smaltire il presente dispositivo, non utilizzare il normale bidone della spazzatura.

L'apparecchiatura elettrica ed elettronica usata devono essere gestita a parte e in conformità alla legislazione che richiede il trattamento, il recupero e il riciclaggio adeguato dei suddetti prodotti.

In seguito alle disposizioni attuate dagli Stati membri, i privati residenti nella UE possono conferire gratuitamente le apparecchiature elettriche ed elettroniche usate a centri di raccolta designati*. In alcuni paesi*, anche il rivenditore locale può ritirare gratuitamente il vecchio prodotto se l'utente acquista un altro nuovo di tipologia simile.

*) Per maggiori informazioni si prega di contattare l'autorità locale competente.

Se le apparecchiature elettriche o elettroniche usate hanno batterie o accumulatori, l'utente dovrà smaltirli a parte preventivamente in conformità alle disposizioni locali.

Lo smaltimento corretto del presente prodotto contribuirà a garantire che i rifiuti siano sottoposti a trattamento, al recupero e al riciclaggio necessari prevenendo il potenziale impatto negativo sull'ambiente e sulla salute umana, che potrebbe derivare da un'adeguata gestione dei rifiuti.

2. In paesi che non fanno parte dell'UE

Se si desidera eliminare il presente prodotto, contattare le autorità locali e informarsi sul metodo di smaltimento corretto.

Per la Svizzera: La apparecchiatura elettrica ed elettronica usate possono essere restituite gratuitamente al rivenditore, anche se non si acquista un prodotto nuovo. Altri centri di raccolta sono elencati sulla homepage di www.swico.ch o di www.sens.ch.

B. Informazioni sullo smaltimento per gli utenti commerciali

1. Nell'Unione europea

Se il prodotto è impiegato a scopi commerciali, procedere come segue per eliminarlo.

Contattare il proprio rivenditore SHARP che fornirà informazioni circa il ritiro del prodotto. Potrebbero essere addebitate le spese di ritiro e riciclaggio. Prodotti piccoli (o quantitativi ridotti) potranno essere ritirati anche dai centri di raccolta locali.

Per la Spagna: Contattare il sistema di raccolta ufficiale o l'ente locale preposto al ritiro dei prodotti usati.

2. In paesi che non fanno parte dell'UE

Se si desidera eliminare il presente prodotto, contattare le autorità locali e informarsi sul metodo di smaltimento corretto.

ITALIANO

A. Informações sobre a Eliminação de Produtos para os Utilizadores (particulares)

1. Na União Europeia

Atenção: Se quiser eliminar este equipamento, não o deve fazer juntamente com o lixo doméstico comum!

O equipamento eléctrico e electrónico deve ser tratado separadamente e ao abrigo da legislação aplicável que obriga a um tratamento, recuperação e reciclagem adequados de equipamentos eléctricos e electrónicos usados.

Após a implementação desta legislação por parte dos Estados-membros, todos os cidadãos residentes na União Europeia poderão entregar o seu equipamento eléctrico e electrónico usado em estações de recolha específicas a título gratuito*. Em alguns países* o seu revendedor local também pode recolher o seu equipamento usado a título gratuito na compra de um novo equipamento.*

*) Contacte as entidades locais para mais informações. Se o seu equipamento eléctrico e electrónico usado funcionar a pilhas ou baterias, deverá eliminá-las em separado, conforme a legislação local, e antes de entregar o seu equipamento.

Ao eliminar este produto correctamente estará a contribuir para que o lixo seja submetido aos processos de tratamento, recuperação e reciclagem adequados. Desta forma é possível evitar os efeitos nocivos que o tratamento inadequado do lixo poderia provocar no ambiente e na saúde.

2. Em outros Países fora da UE

Se quiser eliminar este produto, contacte as entidades locais e informe-se sobre o método correcto para proceder à sua eliminação.

Na Suíça: O equipamento eléctrico e electrónico é aceite, a título gratuito, em qualquer revendedor, mesmo que não tenha adquirido um novo produto. Poderá encontrar uma lista das estações de recolha destes equipamentos na página da Web www.swico.ch ou www.sens.ch.

B. Informações sobre a Eliminação de Produtos para Utilizadores-Empresas.

1. Na União Europeia

Se o produto for usado para fins comerciais e quiser eliminá-lo: Contacte o seu revendedor SHARP que irá informá-lo sobre a melhor forma de eliminar o produto. Poderá ter de pagar as despesas resultantes da recolha e reciclagem do produto. Alguns produtos mais pequenos (e em pequenas quantidades) poderão ser recolhidos pelas estações locais.

Na Espanha: Contacte o sistema de recolhas público ou as entidades locais para mais informações sobre a recolha de produtos usados.

2. Em outros Países fora da UE

Se quiser eliminar este produto, contacte as entidades locais e informe-se sobre o método correcto para proceder à sua eliminação.

PORTUGUÊS

